



SMCCCD - College of San Mateo

Appendix M: Sidewalks

Access Compliance Survey Report

DRAFT



Table of Contents

I. Cover & Table of Contents

- i. Report Navigation and Legend, Abbreviations
- ii. Master Street List
- iii. Cost Summary

II. Survey Data - Sidewalks





NAVIGATION & LEGEND

NAVIGATION

San Mateo College												Access Compliance Survey Report - Sidewalks												Route 113	
Funding Source: TBD												Year to be Completed												TBD	
Direction Traveled		Run ID		Route		Start of Route				End of Route				Priority											
NW		1904181002		ROUTE 113		CENTRAL HALL 16				SOUTH HALL 14				TBD											
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total																	
1353272	4.8 to 8.8 feet	Cross Slope (PAR)	2-3%	20 ft	80	SF	\$120	\$9,600																	
1353273	23.2 to 24.2 feet	Cross Slope (PAR)	2-3%	20 ft	20	SF	\$120	\$2,400																	
1353274	31.0 to 38.1 feet	Cross Slope (PAR)	2-3%	20 ft	142	SF	\$120	\$17,040																	
1353275	44.8 to 47.9 feet	Cross Slope (PAR)	2-3%	20 ft	62	SF	\$120	\$7,440																	
1353269	110.9 to 111.9 feet	Vertical Change	.3	20 ft	20	LF	\$75	\$1,500																	
1353270	127.3 to 128.3 feet	Vertical Change	.3	20 ft	20	LF	\$75	\$1,500																	
1353276	156.0 to 163.8 feet	Cross Slope (PAR)	2-3%	20 ft	156	SF	\$120	\$18,720																	
1353271	160.2 to 161.2 feet	Vertical Change	.3	20 ft	20	REF																			
1353277	182.3 to 183.3 feet	Cross Slope (PAR)	2-3%	20 ft	20	SF	\$120	\$2,400																	
TOTAL COST FOR: NW							<i>dir. of</i> ROUTE 113		<i>Starting at:</i> CENTRAL HALL 16		\$60,600.00														

1. **Direction of Travel:** Corresponds to the side of the street surveyed:
- N, S, E and W.
2. **Dist. from Start:** The location of the identified barrier, measured in feet from the starting building or route.
3. **Route:** Name of arterial/primary route for which barriers are being surveyed.
4. **Barrier Type:** Type of barrier recorded.
5. **Start of Route:** Name of the starting building from which barrier locations are being measured.
6. **Measurement:** Existing condition/dimension.
7. **Sidewalk Width:** Width of the sidewalk measured in feet.
8. **Qty:** Number of solutions required.
9. **End of Route:** Name of the ending building from which barrier locations are being measured.
10. **Unit:** Unit of measurement used to compute estimate. LF=linear feet; SF=square feet; JOB=lump sum; REF=reference
11. **Cost:** Estimated cost of specific solution per one unit (the final cost of barrier removal may exceed this estimate based on the year of mitigation, design approach, and chosen method of mitigation).
12. **Total:** Total estimated cost for removing identified barrier (multiplied Qty by Cost).
13. **Priority:** Priority number assigned to specific barrier based on prioritization criteria which include: expected frequency of use and severity of the barrier. Measured on a scale of 0 to 200, with 200 being the highest priority and 0 being the least.

LEGEND ABBREVIATIONS

ADA	Americans with Disabilities Act
ADAAG	ADA Accessibility Guidelines
E	East
Fig.	Figure
JOB	per one job (lump sum)
lbs.	Pounds
LF	Linear foot
MUTCD	Manual on Uniform Traffic Control Devices
N	North
NE	Northeast
NW	Northwest
POT	Path of travel
PROW	Public Right-of-Way
PROWAG	Public Right-of-Way Accessible Guidelines
Qty	Quantity
REF	Reference; Provided in locations with overlapping issue; indicates no addition cost required for mitigation
S	South
SE	Southeast
SF	Square foot
SW	Southwest
TBD	To be determined
W	West



MASTER ROUTES LIST

	<i>Total Cost for Street:</i>
Street: ROUTE 10	\$24,264.00
Street: ROUTE 100	\$4,608.00
Street: ROUTE 11	\$8,064.00
Street: ROUTE 113	\$60,600.00
Street: ROUTE 13	\$18,162.00
Street: ROUTE 14	\$19,440.00
Street: ROUTE 15	\$750.00
Street: ROUTE 16	\$214,470.00
Street: ROUTE 17	\$226,368.00
Street: ROUTE 18	\$5,616.00
Street: ROUTE 19	\$27,072.00
Street: ROUTE 21	\$18,288.00
Street: ROUTE 22	\$2,628.00
Street: ROUTE 23	\$6,192.00
Street: ROUTE 27	\$16,992.00
Street: ROUTE 29	\$55,603.96
Street: ROUTE 31	\$2,749.94
Street: ROUTE 32	\$58,793.93
Street: ROUTE 34	\$36,756.00
Street: ROUTE 35	\$73,998.00
Street: ROUTE 36	\$27,792.00
Street: ROUTE 37	\$24,180.00
Street: ROUTE 38	\$10,080.00
Street: ROUTE 39	\$50,434.08
Street: ROUTE 41	\$10,680.00
Street: ROUTE 42	\$188,646.57
Street: ROUTE 43	\$80,184.00
Street: ROUTE 44	\$20,928.00
Street: ROUTE 45	\$175,339.16
Street: ROUTE 46	\$29,136.00
Street: ROUTE 47	\$3,574.93
Street: ROUTE 48	\$600.00
Street: ROUTE 49	\$27,945.00
Street: ROUTE 51	\$23,235.00
Street: ROUTE 52	\$126,309.00
Street: ROUTE 53	\$17,520.00
Street: ROUTE 54	\$71,856.00
Street: ROUTE 56	\$92,280.00
Street: ROUTE 57	\$63,456.00
Street: ROUTE 58	\$87,360.00
Street: ROUTE 59	\$1,800.00
Street: ROUTE 60	\$5,592.00
Street: ROUTE 61	\$11,040.00
Street: ROUTE 66	\$149,184.00
Street: ROUTE 67	\$600.00
Street: ROUTE 68	\$27,672.00
Street: ROUTE 7	\$8,154.00
Street: ROUTE 81	\$30,402.00
Street: ROUTE 82	\$19,989.00
Street: ROUTE 85	\$25,722.00
Street: ROUTE 9	\$44,586.00
Street: ROUTE 90	\$64,368.00
Street: ROUTE 96	\$11,520.00
Street: ROUTE 97	\$16,275.00
Street: ROUTE 99	\$1,824.00
Total Cost for College Sidewalks:	\$2,431,679.57



COST SUMMARY

ROUTE 10				Total Cost for Route:	\$24,264.00
Route	Starting Route	Ending Route	Direction Traveled		
ROUTE 10	BEETHOVEN LOT 2	THEATER 3	NE		
					\$24,264.00
ROUTE 100				Total Cost for Route:	\$4,608.00
Route	Starting Route	Ending Route	Direction Traveled		
ROUTE 100	GALILEO LOT 6	GALILEO LOT 6	N		
					\$4,608.00
ROUTE 11				Total Cost for Route:	\$8,064.00
Route	Starting Route	Ending Route	Direction Traveled		
ROUTE 11	BEETHOVEN LOT 2	THEATER 3	NE		
					\$8,064.00
ROUTE 113				Total Cost for Route:	\$60,600.00
Route	Starting Route	Ending Route	Direction Traveled		
ROUTE 113	CENTRAL HALL 16	SOUTH HALL 14	NW		
					\$60,600.00
ROUTE 13				Total Cost for Route:	\$18,162.00
Route	Starting Route	Ending Route	Direction Traveled		
ROUTE 13	ART 4	DAVINCI LOT 3	NW		
					\$18,162.00
ROUTE 14				Total Cost for Route:	\$19,440.00
Route	Starting Route	Ending Route	Direction Traveled		
ROUTE 14	ART 4	DAVINCI LOT 3	NE		
					\$19,440.00
ROUTE 15				Total Cost for Route:	\$750.00
Route	Starting Route	Ending Route	Direction Traveled		
ROUTE 15	HEALTH & WELLNESS 5	PUBLIC SAFETY & MEDICAL	NW		
					\$750.00
ROUTE 16				Total Cost for Route:	\$214,470.00
Route	Starting Route	Ending Route	Direction Traveled		
ROUTE 16	HEALTH & WELLNESS 5	LIBRARY 9	NE		
					\$214,470.00
ROUTE 17				Total Cost for Route:	\$226,368.00
Route	Starting Route	Ending Route	Direction Traveled		
ROUTE 17	GYMNASIUM	COLLEGE CENTER 10	NW		
					\$226,368.00
ROUTE 18				Total Cost for Route:	\$5,616.00
Route	Starting Route	Ending Route	Direction Traveled		
ROUTE 18	COLLEGE CENTER 10	COLLEGE CENTER 10	SE		
					\$5,616.00
ROUTE 19				Total Cost for Route:	\$27,072.00
Route	Starting Route	Ending Route	Direction Traveled		
ROUTE 19	COLLEGE CENTER 10	COLLEGE CENTER 10	SW		
					\$27,072.00
ROUTE 21				Total Cost for Route:	\$18,288.00
Route	Starting Route	Ending Route	Direction Traveled		
ROUTE 21	COLLEGE CENTER 10	COLLEGE CENTER 10	NW		
					\$18,288.00
ROUTE 22				Total Cost for Route:	\$2,628.00
Route	Starting Route	Ending Route	Direction Traveled		
ROUTE 22	COLLEGE CENTER 10	EAST HALL 12	NW		
					\$2,628.00
ROUTE 23				Total Cost for Route:	\$6,192.00
Route	Starting Route	Ending Route	Direction Traveled		
ROUTE 23	COLLEGE CENTER 10	FORUM LOT 8	NE		
					\$6,192.00
ROUTE 27				Total Cost for Route:	\$16,992.00
Route	Starting Route	Ending Route	Direction Traveled		


ROUTE 27	EAST PERIMETER ROAD	FIRE TECHNOLOGY, ITS, &	NW	\$16,992.00
ROUTE 29				Total Cost for Route: \$55,603.96
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 29	COLLEGE CENTER 10	COLLEGE CENTER 10	SE	\$55,603.96
ROUTE 31				Total Cost for Route: \$2,749.94
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 31	EMERGING TECHNOLOGIES	EAST HALL 12	NE	\$2,749.94
ROUTE 32				Total Cost for Route: \$58,793.93
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 32	CENTRAL HALL 16	EMERGING TECHNOLOGIES 19	NE	\$58,793.93
ROUTE 34				Total Cost for Route: \$36,756.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 34	AQUATICS LANE	HEALTH & WELLNESS	NW	\$36,756.00
ROUTE 35				Total Cost for Route: \$73,998.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 35	AQUATIC CENTER	GYMNASIUM 8	NE	\$73,998.00
ROUTE 36				Total Cost for Route: \$27,792.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 36	AQUATIC CENTER	GYMNASIUM 8	NE	\$27,792.00
ROUTE 37				Total Cost for Route: \$24,180.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 37	SOUTH HALL 14	CENTRAL HALL 16	NW	\$24,180.00
ROUTE 38				Total Cost for Route: \$10,080.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 38	COLLEGE CENTER 10	CENTRAL HALL 16	S	\$10,080.00
ROUTE 39				Total Cost for Route: \$50,434.08
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 39	EMERGING TECHNOLOGIES	COLLEGE CENTER 10	SE	\$50,434.08
ROUTE 41				Total Cost for Route: \$10,680.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 41	CENTRAL HALL 16	COLLEGE CENTER 10	E	\$10,680.00
ROUTE 42				Total Cost for Route: \$188,646.57
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 42	COLLEGE CENTER 10	SOUTH HALL 14	SW	\$188,646.57
ROUTE 43				Total Cost for Route: \$80,184.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 43	SOUTH HALL 14	CENTRAL HALL 16	NW	\$80,184.00
ROUTE 44				Total Cost for Route: \$20,928.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 44	NORTH HALL 18	NORTH HALL 18	SW	\$20,928.00
ROUTE 45				Total Cost for Route: \$175,339.16
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 45	CENTRAL HALL 16	NORTH HALL 18	NW	\$175,339.16

ROUTE 46				Total Cost for Route:	\$29,136.00	
Route	Starting Route	Ending Route	Direction Traveled			
ROUTE 46	MARIE CURIE LOT 5	NORTH HALL 18	E			\$29,136.00
ROUTE 47				Total Cost for Route:	\$3,574.93	
Route	Starting Route	Ending Route	Direction Traveled			
ROUTE 47	EMERGING TECHNOLOGIES	CENTRAL HALL 16	SE			\$3,574.93
ROUTE 48				Total Cost for Route:	\$600.00	
Route	Starting Route	Ending Route	Direction Traveled			
ROUTE 48	BUILDING 17	EMERGING TECHNOLOGIES 19	NE			\$600.00
ROUTE 49				Total Cost for Route:	\$27,945.00	
Route	Starting Route	Ending Route	Direction Traveled			
ROUTE 49	EMERGING TECHNOLOGIES	BUILDING 17	SE			\$27,945.00
ROUTE 51				Total Cost for Route:	\$23,235.00	
Route	Starting Route	Ending Route	Direction Traveled			
ROUTE 51	SCIENCE BUILDING 36	EMERGING TECHNOLOGIES 19	NE			\$23,235.00
ROUTE 52				Total Cost for Route:	\$126,309.00	
Route	Starting Route	Ending Route	Direction Traveled			
ROUTE 52	SCIENCE BUILDING 36	SCIENCE BUILDING 36	S			\$126,309.00
ROUTE 53				Total Cost for Route:	\$17,520.00	
Route	Starting Route	Ending Route	Direction Traveled			
ROUTE 53	SCIENCE BUILDING 36	EMERGING TECHNOLOGIES 19	E			\$17,520.00
ROUTE 54				Total Cost for Route:	\$71,856.00	
Route	Starting Route	Ending Route	Direction Traveled			
ROUTE 54	GALILEO LOT 6	PLANETARIUM	SW			\$71,856.00
ROUTE 56				Total Cost for Route:	\$92,280.00	
Route	Starting Route	Ending Route	Direction Traveled			
ROUTE 56	PLANETARIUM	PLANETARIUM	N / S			\$92,280.00
ROUTE 57				Total Cost for Route:	\$63,456.00	
Route	Starting Route	Ending Route	Direction Traveled			
ROUTE 57	GALILEO LOT 6	GALILEO LOT 6	E			\$63,456.00
ROUTE 58				Total Cost for Route:	\$87,360.00	
Route	Starting Route	Ending Route	Direction Traveled			
ROUTE 58	GALILEO LOT 6	GALILEO LOT 6	SE			\$87,360.00
ROUTE 59				Total Cost for Route:	\$1,800.00	
Route	Starting Route	Ending Route	Direction Traveled			
ROUTE 59	GALILEO LOT 6	GALILEO LOT 6	SW			\$1,800.00
ROUTE 60				Total Cost for Route:	\$5,592.00	
Route	Starting Route	Ending Route	Direction Traveled			
ROUTE 60	GALILEO LOT 6	GALILEO LOT 6	SW			\$5,592.00
ROUTE 61				Total Cost for Route:	\$11,040.00	
Route	Starting Route	Ending Route	Direction Traveled			
ROUTE 61	GALILEO LOT 6	GALILEO LOT 6	W			\$11,040.00
ROUTE 66				Total Cost for Route:	\$149,184.00	
Route	Starting Route	Ending Route	Direction Traveled			

ROUTE 66	GALILEO LOT 6	GALILEO LOT 6	N / E	\$149,184.00
ROUTE 67			Total Cost for Route:	\$600.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 67	GALILEO LOT 6	GALILEO LOT 6	N	\$600.00
ROUTE 68			Total Cost for Route:	\$27,672.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 68	GALILEO LOT 6	GALILEO LOT 6	SE	\$27,672.00
ROUTE 7			Total Cost for Route:	\$8,154.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 7	BEETHOVEN LOT 2	BEETHOVEN LOT 2	NW	\$8,154.00
ROUTE 81			Total Cost for Route:	\$30,402.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 81	CSM DRIVE	BEETHOVEN LOT 2	SW	\$30,402.00
ROUTE 82			Total Cost for Route:	\$19,989.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 82	BEETHOVEN LOT 2	CSM DRIVE	NW /	\$19,989.00
ROUTE 85			Total Cost for Route:	\$25,722.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 85	OLYMPIAN LOT 12	AQUATICS LANE	NW	\$25,722.00
ROUTE 9			Total Cost for Route:	\$44,586.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 9	CSM DRIVE	THEATER 3	NW	\$44,586.00
ROUTE 90			Total Cost for Route:	\$64,368.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 90	FORUM LOT 8	FORUM LOT 8	NW	\$64,368.00
ROUTE 96			Total Cost for Route:	\$11,520.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 96	GALILEO LOT 6	GALILEO LOT 6	SE	\$11,520.00
ROUTE 97			Total Cost for Route:	\$16,275.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 97	CENTRAL HALL 16	CENTRAL HALL 16	NE	\$16,275.00
ROUTE 99			Total Cost for Route:	\$1,824.00
Route	Starting Route	Ending Route	Direction Traveled	
ROUTE 99	GALILEO LOT 6	GALILEO LOT 6	N	\$1,824.00
Total Cost for College Sidewalks:				\$2,431,679.57



SURVEY DATA

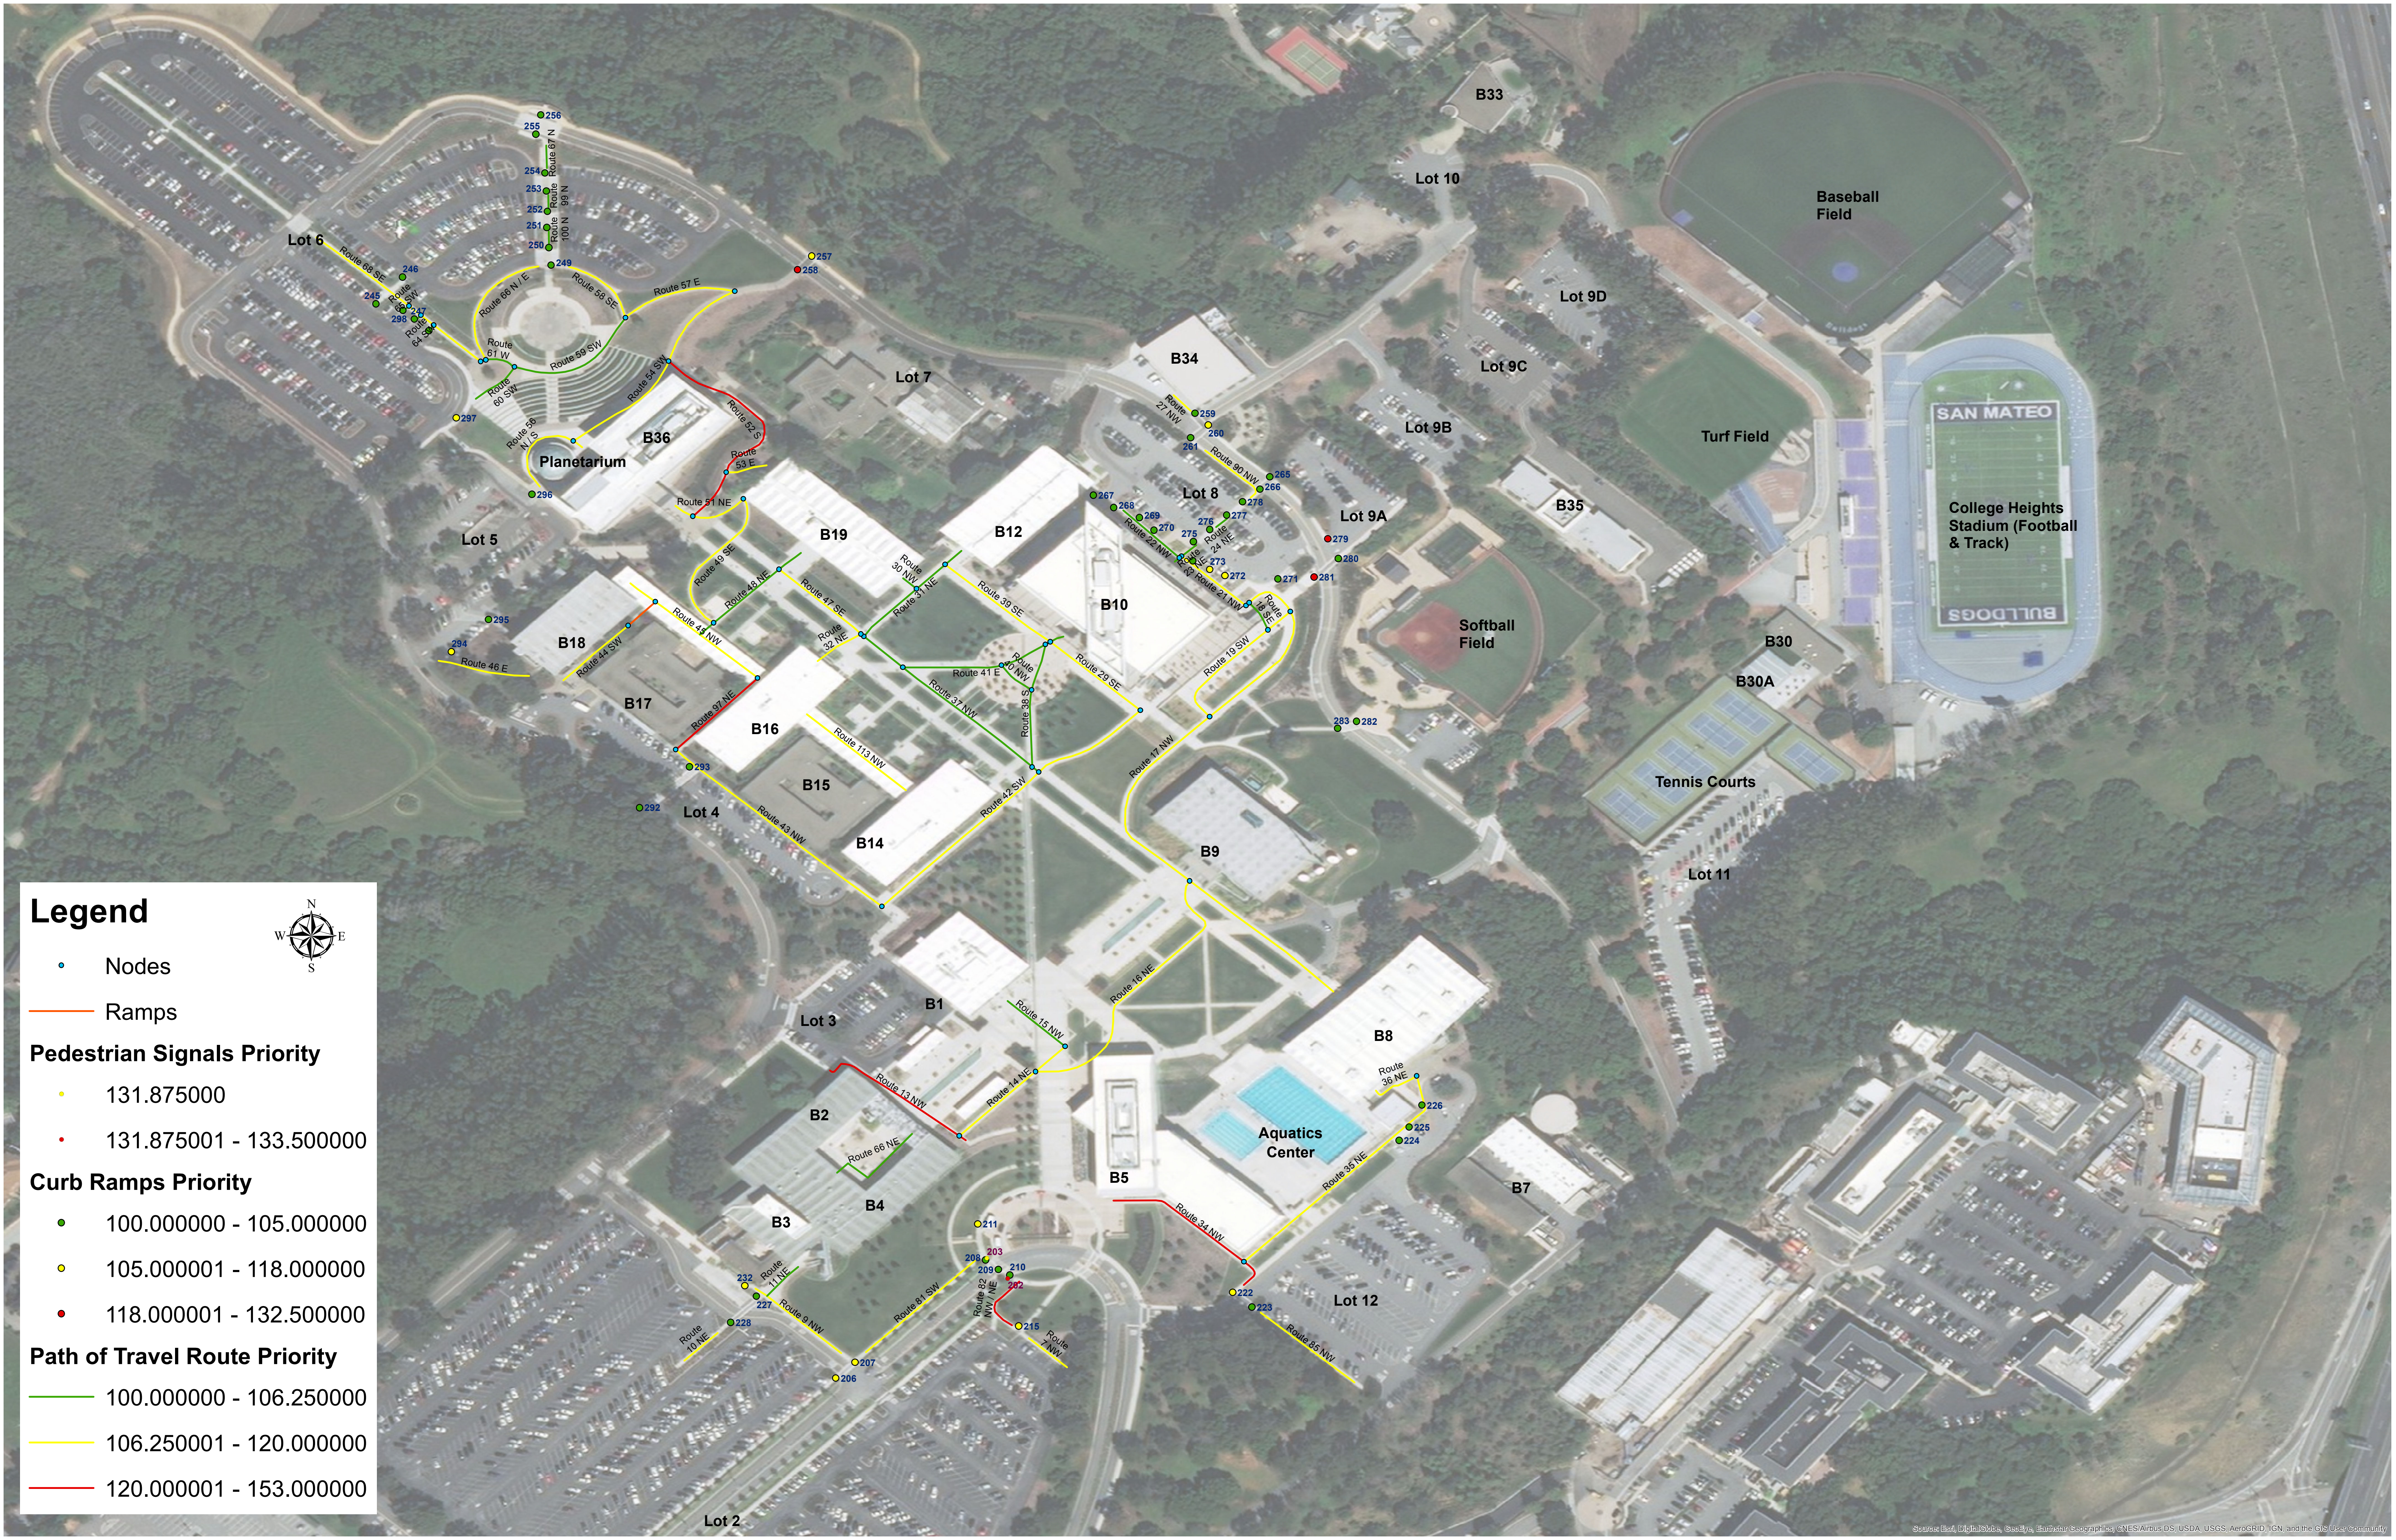

Legend

• Nodes

— Ramps

Pedestrian Signals Priority


- 131.875000
- 131.875001 - 133.500000

Curb Ramps Priority


- 100.000000 - 105.000000
- 105.000001 - 118.000000
- 118.000001 - 132.500000

Path of Travel Route Priority

- 100.000000 - 106.250000
- 106.250001 - 120.000000
- 120.000001 - 153.000000



College of San Mateo Path of Travel Routes



Funding Source: TBD

Year to be Completed TBD

Direction Traveled	Run ID	Route	Start of Route	End of Route					Priority
NE	1904171129	ROUTE 10	BEETHOVEN LOT 2	THEATER 3					111.25
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1352784	6.8 to 18.1 feet	Cross Slope (PAR)	2-3%	6 ft	68	SF	\$120	\$8,136	
1352785	52.2 to 53.2 feet	Cross Slope (PAR)	2-3%	6 ft	6	SF	\$120	\$720	
1352786	64.8 to 86.2 feet	Cross Slope (PAR)	2-3%	6 ft	128	SF	\$120	\$15,408	
1352787	83.6 to 86.2 feet	Running Slope	6-7%	6 ft	16	REF			
1352960	19.4 to 20.6 feet	Running Slope	5-6%	8 ft	10	SF	\$120	\$1,152	
1352961	20.6 to 24.2 feet	Running Slope	6-7%	8 ft	29	SF	\$120	\$3,456	
1352788	19.5 to 22.9 feet	Cross Slope (PAR)	2-3%	6 ft	20	SF	\$120	\$2,448	
1352789	26.1 to 28.8 feet	Cross Slope (PAR)	2-3%	6 ft	16	SF	\$120	\$1,944	
1352790	32.3 to 36.0 feet	Cross Slope (PAR)	2-3%	6 ft	22	SF	\$120	\$2,664	
1352791	39.6 to 41.0 feet	Running Slope	5-6%	6 ft	8	SF	\$120	\$1,008	
1353272	4.8 to 8.8 feet	Cross Slope (PAR)	2-3%	20 ft	80	SF	\$120	\$9,600	
1353273	23.2 to 24.2 feet	Cross Slope (PAR)	2-3%	20 ft	20	SF	\$120	\$2,400	
1353274	31.0 to 38.1 feet	Cross Slope (PAR)	2-3%	20 ft	142	SF	\$120	\$17,040	
1353275	44.8 to 47.9 feet	Cross Slope (PAR)	2-3%	20 ft	62	SF	\$120	\$7,440	
1353269	110.9 to 111.9 feet	Vertical Change	.3	20 ft	20	LF	\$75	\$1,500	
1353270	127.3 to 128.3 feet	Vertical Change	.3	20 ft	20	LF	\$75	\$1,500	
1353276	156.0 to 163.8 feet	Cross Slope (PAR)	2-3%	20 ft	156	SF	\$120	\$18,720	
1353271	160.2 to 161.2 feet	Vertical Change	.3	20 ft	20	REF			
1353277	182.3 to 183.3 feet	Cross Slope (PAR)	2-3%	20 ft	20	SF	\$120	\$2,400	
1352793	0.0 to 1.5 feet	Cross Slope (PAR)	2-3%	6 ft	9	SF	\$120	\$1,080	
1352798	4.5 to 6.6 feet	Running Slope	5-6%	6 ft	13	SF	\$120	\$1,512	
1352799	40.1 to 41.1 feet	Walkway Surface		6 ft	6	SF	\$120	\$720	
1352794	93.5 to 97.3 feet	Cross Slope (PAR)	2-3%	6 ft	23	SF	\$120	\$2,736	
1352792	181.3 to 182.3 feet	Vertical Change	.4	6 ft	6	LF	\$75	\$450	
1352795	215.9 to 218.7 feet	Cross Slope (PAR)	6-7%	6 ft	17	SF	\$120	\$2,016	
1352796	221.1 to 229.3 feet	Cross Slope (PAR)	4-5%	6 ft	49	SF	\$120	\$5,904	
1352797	230.5 to 235.7 feet	Cross Slope (PAR)	2-3%	6 ft	31	SF	\$120	\$3,744	
1352802	1.3 to 2.4 feet	Running Slope	5-6%	10 ft	11	SF	\$120	\$1,320	

Funding Source: **TBD**Year to be Completed **TBD**

Direction Traveled	Run ID	Route	Start of Route	End of Route					Priority
NE	1904171158	ROUTE 14	ART 4	DAVINCI LOT 3					111.25
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1352800	35.1 to 38.3 feet	Cross Slope (PAR)	2-3%	10 ft	32	SF	\$120	\$3,840	
1352801	147.8 to 159.7 feet	Cross Slope (PAR)	2-3%	10 ft	119	SF	\$120	\$14,280	
1352803	14.9 to 15.9 feet	Vertical Change	.3	10 ft	10	LF	\$75	\$750	
1352804	6.7 to 7.7 feet	Vertical Change	.3	10 ft	10	LF	\$75	\$750	
1352812	40.0 to 47.8 feet	Cross Slope (PAR)	2-3%	10 ft	78	SF	\$120	\$9,360	
1352813	50.0 to 51.5 feet	Cross Slope (PAR)	3-4%	10 ft	15	SF	\$120	\$1,800	
1352814	51.5 to 53.1 feet	Cross Slope (PAR)	2-3%	10 ft	16	SF	\$120	\$1,920	
1352815	115.6 to 136.4 feet	Cross Slope (PAR)	2-3%	10 ft	208	SF	\$120	\$24,960	
1352805	147.5 to 148.5 feet	Vertical Change	.4	10 ft	10	LF	\$75	\$750	
1352816	167.2 to 174.8 feet	Cross Slope (PAR)	2-3%	10 ft	76	SF	\$120	\$9,120	
1352806	190.0 to 191.0 feet	Vertical Change	.3	10 ft	10	LF	\$75	\$750	
1352817	202.5 to 206.0 feet	Cross Slope (PAR)	2-3%	10 ft	35	SF	\$120	\$4,200	
1352807	207.2 to 208.2 feet	Vertical Change	.4	10 ft	10	LF	\$75	\$750	
1352818	208.3 to 230.6 feet	Cross Slope (PAR)	2-3%	10 ft	223	SF	\$120	\$26,760	
1352819	233.9 to 244.8 feet	Cross Slope (PAR)	2-3%	10 ft	109	SF	\$120	\$13,080	
1352808	256.3 to 257.3 feet	Vertical Change	.3	10 ft	10	LF	\$75	\$750	
1352820	259.7 to 264.1 feet	Cross Slope (PAR)	2-3%	10 ft	44	SF	\$120	\$5,280	
1352821	267.1 to 277.7 feet	Cross Slope (PAR)	2-3%	10 ft	106	SF	\$120	\$12,720	
1352822	283.7 to 296.8 feet	Cross Slope (PAR)	2-3%	10 ft	131	SF	\$120	\$15,720	
1352809	288.7 to 289.7 feet	Vertical Change	.3	10 ft	10	REF			
1352823	308.2 to 329.3 feet	Cross Slope (PAR)	2-3%	10 ft	211	SF	\$120	\$25,320	
1352824	339.5 to 346.0 feet	Cross Slope (PAR)	2-3%	10 ft	65	SF	\$120	\$7,800	
1352825	349.5 to 352.1 feet	Cross Slope (PAR)	2-3%	10 ft	26	SF	\$120	\$3,120	
1352826	352.1 to 353.6 feet	Cross Slope (PAR)	4-5%	10 ft	15	SF	\$120	\$1,800	
1352827	354.2 to 355.7 feet	Cross Slope (PAR)	6-7%	10 ft	15	SF	\$120	\$1,800	
1352828	356.3 to 359.1 feet	Cross Slope (PAR)	8-9%	10 ft	28	SF	\$120	\$3,360	
1352829	360.2 to 361.2 feet	Cross Slope (PAR)	6-7%	10 ft	10	SF	\$120	\$1,200	
1352830	364.0 to 367.5 feet	Cross Slope (PAR)	4-5%	10 ft	35	SF	\$120	\$4,200	

Funding Source: **TBD**Year to be Completed **TBD**

Direction Traveled	Run ID	Route	Start of Route	End of Route					Priority
NE	1904171204	ROUTE 16	HEALTH & WELLNESS 5	LIBRARY 9					118.75
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1352831	367.5 to 371.9 feet	Cross Slope (PAR)	2-3%	10 ft	44	SF	\$120	\$5,280	
1352834	369.3 to 373.2 feet	Running Slope	5-6%	10 ft	39	REF			
1352832	395.3 to 404.6 feet	Cross Slope (PAR)	2-3%	10 ft	93	SF	\$120	\$11,160	
1352810	402.5 to 403.5 feet	Vertical Change	.3	10 ft	10	REF			
1352833	419.9 to 437.2 feet	Cross Slope (PAR)	2-3%	10 ft	173	SF	\$120	\$20,760	
1352811	432.3 to 433.3 feet	Vertical Change	.3	10 ft	10	REF			
1352835	78.2 to 79.2 feet	Vertical Change	.4	12 ft	12	LF	\$75	\$900	
1352858	101.1 to 108.4 feet	Cross Slope (PAR)	2-3%	12 ft	88	SF	\$120	\$10,512	
1352859	114.2 to 126.8 feet	Cross Slope (PAR)	2-3%	12 ft	151	SF	\$120	\$18,144	
1352836	119.4 to 120.4 feet	Vertical Change	.3	12 ft	12	REF			
1352837	160.4 to 161.4 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900	
1352838	176.8 to 177.8 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900	
1352839	205.4 to 206.4 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900	
1352840	226.0 to 227.0 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900	
1352860	274.5 to 278.8 feet	Cross Slope (PAR)	2-3%	12 ft	52	SF	\$120	\$6,192	
1352841	275.5 to 276.5 feet	Vertical Change	.3	12 ft	12	REF			
1352842	283.6 to 284.6 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900	
1352861	287.8 to 291.3 feet	Cross Slope (PAR)	2-3%	12 ft	42	SF	\$120	\$5,040	
1352843	291.9 to 292.9 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900	
1352862	297.6 to 299.3 feet	Cross Slope (PAR)	2-3%	12 ft	20	SF	\$120	\$2,448	
1352844	316.4 to 317.4 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900	
1352880	377.9 to 379.9 feet	Running Slope	6-7%	12 ft	24	SF	\$120	\$2,880	
1352863	382.3 to 385.0 feet	Cross Slope (PAR)	2-3%	12 ft	32	SF	\$120	\$3,888	
1352881	385.1 to 386.4 feet	Running Slope	5-6%	12 ft	16	SF	\$120	\$1,872	
1352864	387.3 to 389.0 feet	Cross Slope (PAR)	2-3%	12 ft	20	SF	\$120	\$2,448	
1352845	397.2 to 398.2 feet	Vertical Change	.5	12 ft	12	LF	\$75	\$900	
1352846	405.3 to 406.3 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900	
1352883	408.4 to 409.4 feet	Vertical Change		12 ft	12	SF	\$60	\$720	

Funding Source: TBD

Year to be Completed TBD

Direction Traveled	Run ID	Route	Start of Route	End of Route	Year to be Completed TBD					Priority
NW	1904171211	ROUTE 17	GYMNASIUM	COLLEGE CENTER 10						116.25
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total		
1352865	431.4 to 432.5 feet	Cross Slope (PAR)	2-3%	12 ft	13	SF	\$120	\$1,584		
1352847	438.9 to 439.9 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900		
1352848	455.0 to 456.0 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900		
1352866	482.8 to 486.8 feet	Cross Slope (PAR)	2-3%	12 ft	48	SF	\$120	\$5,760		
1352849	495.4 to 496.4 feet	Vertical Change	.7	12 ft	12	SF	\$75	\$900		
1352850	503.6 to 504.6 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900		
1352851	602.1 to 603.1 feet	Vertical Change	.7	12 ft	12	SF	\$75	\$900		
1352867	626.3 to 627.5 feet	Cross Slope (PAR)	2-3%	12 ft	14	SF	\$120	\$1,728		
1352852	627.7 to 628.7 feet	Vertical Change	.6	12 ft	12	SF	\$75	\$900		
1352868	639.5 to 642.8 feet	Cross Slope (PAR)	2-3%	12 ft	40	SF	\$120	\$4,752		
1352869	647.6 to 649.5 feet	Cross Slope (PAR)	2-3%	12 ft	23	SF	\$120	\$2,736		
1352870	663.8 to 719.8 feet	Cross Slope (PAR)	2-3%	12 ft	672	SF	\$120	\$80,640		
1352853	692.2 to 693.2 feet	Vertical Change	.3	12 ft	12	REF				
1352871	728.4 to 738.3 feet	Cross Slope (PAR)	2-3%	12 ft	119	SF	\$120	\$14,256		
1352854	748.7 to 749.7 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900		
1352872	770.9 to 772.3 feet	Cross Slope (PAR)	2-3%	12 ft	17	SF	\$120	\$2,016		
1352855	826.8 to 827.8 feet	Vertical Change	.4	12 ft	12	LF	\$75	\$900		
1352873	828.7 to 830.1 feet	Cross Slope (PAR)	2-3%	12 ft	17	SF	\$120	\$2,016		
1352874	832.6 to 840.7 feet	Cross Slope (PAR)	2-3%	12 ft	97	SF	\$120	\$11,664		
1352875	845.2 to 852.3 feet	Cross Slope (PAR)	2-3%	12 ft	85	SF	\$120	\$10,224		
1352876	870.1 to 874.2 feet	Cross Slope (PAR)	2-3%	12 ft	49	SF	\$120	\$5,904		
1352856	881.5 to 882.5 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900		
1352877	887.0 to 888.3 feet	Cross Slope (PAR)	3-4%	12 ft	16	SF	\$120	\$1,872		
1352882	887.1 to 888.6 feet	Running Slope	5-6%	12 ft	18	REF				
1352878	890.6 to 895.3 feet	Cross Slope (PAR)	4-5%	12 ft	56	SF	\$120	\$6,768		
1352879	895.3 to 896.9 feet	Cross Slope (PAR)	2-3%	12 ft	19	SF	\$120	\$2,304		
1352857	909.7 to 910.7 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900		
1352884	25.5 to 29.4 feet	Cross Slope (PAR)	2-3%	12 ft	47	SF	\$120	\$5,616		

Funding Source: **TBD**Year to be Completed **TBD**

Direction Traveled	Run ID	Route	Start of Route	End of Route	Year to be Completed				Priority
SW	1904171216	ROUTE 19	COLLEGE CENTER 10	COLLEGE CENTER 10					111.25
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1352885	4.2 to 5.2 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900	
1352889	24.8 to 26.3 feet	Cross Slope (PAR)	2-3%	12 ft	18	SF	\$120	\$2,160	
1352890	38.8 to 41.4 feet	Cross Slope (PAR)	2-3%	12 ft	31	SF	\$120	\$3,744	
1352886	47.2 to 48.2 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900	
1352887	54.4 to 55.4 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900	
1352891	66.6 to 67.6 feet	Cross Slope (PAR)	2-3%	12 ft	12	SF	\$120	\$1,440	
1352892	96.0 to 97.5 feet	Cross Slope (PAR)	2-3%	12 ft	18	SF	\$120	\$2,160	
1352888	155.0 to 156.0 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900	
1352893	165.7 to 168.8 feet	Cross Slope (PAR)	2-3%	12 ft	37	SF	\$120	\$4,464	
1352894	173.8 to 175.4 feet	Cross Slope (PAR)	2-3%	12 ft	19	SF	\$120	\$2,304	
1352895	179.5 to 182.7 feet	Cross Slope (PAR)	2-3%	12 ft	38	SF	\$120	\$4,608	
1352896	207.7 to 209.5 feet	Running Slope	5-6%	12 ft	22	SF	\$120	\$2,592	
1352897	35.6 to 42.2 feet	Cross Slope (PAR)	2-3%	12 ft	79	SF	\$120	\$9,504	
1352898	57.5 to 60.4 feet	Cross Slope (PAR)	2-3%	12 ft	35	SF	\$120	\$4,176	
1352899	63.0 to 66.2 feet	Cross Slope (PAR)	2-3%	12 ft	38	SF	\$120	\$4,608	
1352900	106.2 to 107.2 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900	
1352901	109.4 to 110.6 feet	Running Slope	5-6%	12 ft	14	SF	\$120	\$1,728	
1352902	0.0 to 3.3 feet	Cross Slope (PAR)	2-3%	12 ft	40	SF	\$120	\$4,752	
1352903	45.3 to 46.3 feet	Running Slope	5-6%	12 ft	12	SF	\$120	\$1,440	
1352917	5.3 to 8.2 feet	Running Slope	6-7%	12 ft	35	SF	\$120	\$4,176	
1352918	17.8 to 20.5 feet	Running Slope	5-6%	12 ft	32	SF	\$120	\$3,888	
1352919	20.5 to 21.9 feet	Running Slope	6-7%	12 ft	17	SF	\$120	\$2,016	
1352920	23.8 to 27.8 feet	Running Slope	5-6%	12 ft	48	REF			
1352916	27.0 to 30.8 feet	Cross Slope (PAR)	2-3%	12 ft	46	SF	\$120	\$5,472	
1352921	27.8 to 32.8 feet	Running Slope	6-7%	12 ft	60	REF			
1352922	32.8 to 33.8 feet	Running Slope	8-9%	12 ft	12	SF	\$120	\$1,440	
1353210	4.0 to 10.4 feet	Cross Slope (PAR)	2-3%	18 ft	117	SF	\$120	\$14,080	
1353202	17.0 to 18.0 feet	Vertical Change	.3	18 ft	18	LF	\$75	\$1,375	

Funding Source: TBD

Year to be Completed TBD

Direction Traveled	Run ID	Route	Start of Route	End of Route					Priority
SE	1904180940	ROUTE 29	COLLEGE CENTER 10	COLLEGE CENTER 10					110
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1353203	64.4 to 65.4 feet	Vertical Change	.3	18 ft	18	LF	\$75	\$1,375	
1353211	80.8 to 85.0 feet	Cross Slope (PAR)	2-3%	18 ft	77	SF	\$120	\$9,240	
1353204	90.1 to 91.1 feet	Vertical Change	.3	18 ft	18	LF	\$75	\$1,375	
1353212	98.7 to 100.4 feet	Cross Slope (PAR)	2-3%	18 ft	31	SF	\$120	\$3,740	
1353205	106.6 to 107.6 feet	Vertical Change	.3	18 ft	18	LF	\$75	\$1,375	
1353213	118.3 to 119.4 feet	Cross Slope (PAR)	2-3%	18 ft	20	SF	\$120	\$2,420	
1353206	130.7 to 131.7 feet	Vertical Change	.3	18 ft	18	LF	\$75	\$1,375	
1353207	140.4 to 144.0 feet	Vertical Change	.3	18 ft	66	LF	\$75	\$4,950	
1353214	148.1 to 149.8 feet	Cross Slope (PAR)	2-3%	18 ft	31	SF	\$120	\$3,740	
1353208	148.6 to 149.6 feet	Vertical Change	.3	18 ft	18	REF			
1353215	155.3 to 160.1 feet	Cross Slope (PAR)	2-3%	18 ft	88	SF	\$120	\$10,560	
1353209	157.4 to 158.4 feet	Vertical Change	.4	18 ft	18	REF			
1353193	165.7 to 166.7 feet	Vertical Change	.4	18 ft	18	LF	\$75	\$1,375	
1353194	176.3 to 177.3 feet	Vertical Change	.3	18 ft	18	LF	\$75	\$1,375	
1353189	0.0 to 6.6 feet	Cross Slope (PAR)	2-3%	18 ft	121	SF	\$120	\$14,520	
1353190	9.4 to 11.3 feet	Cross Slope (PAR)	3-4%	18 ft	35	SF	\$120	\$4,180	
1353191	13.4 to 29.7 feet	Cross Slope (PAR)	4-5%	18 ft	299	SF	\$120	\$35,859	
1353192	31.0 to 32.3 feet	Cross Slope (PAR)	2-3%	18 ft	24	SF	\$120	\$2,860	
1353188	67.5 to 68.5 feet	Vertical Change	.9	18 ft	18	SF	\$75	\$1,375	
1352729	0.1 to 3.2 feet	Cross Slope (PAR)	2-3%	6 ft	19	SF	\$120	\$2,232	
1352723	9.5 to 10.5 feet	Vertical Change	.3	6 ft	6	LF	\$75	\$450	
1352724	21.9 to 22.9 feet	Vertical Change	.3	6 ft	6	LF	\$75	\$450	
1352730	27.8 to 29.1 feet	Cross Slope (PAR)	5-6%	6 ft	8	SF	\$120	\$936	
1352731	29.1 to 31.1 feet	Cross Slope (PAR)	6-7%	6 ft	12	SF	\$120	\$1,440	
1352732	31.8 to 38.8 feet	Cross Slope (PAR)	5-6%	6 ft	42	SF	\$120	\$5,040	
1352733	40.2 to 41.3 feet	Cross Slope (PAR)	3-4%	6 ft	7	SF	\$120	\$792	
1352734	55.3 to 57.3 feet	Cross Slope (PAR)	2-3%	6 ft	12	SF	\$120	\$1,440	
1352725	66.5 to 67.5 feet	Vertical Change	.4	6 ft	6	LF	\$75	\$450	

Funding Source: TBD

Year to be Completed TBD

Direction Traveled	Run ID	Route	Start of Route	End of Route					Priority
NW	1904171107	ROUTE 34	AQUATICS LANE	HEALTH & WELLNESS					125
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1352735	73.8 to 74.9 feet	Cross Slope (PAR)	2-3%	6 ft	7	SF	\$120	\$792	
1352736	78.6 to 80.2 feet	Cross Slope (PAR)	2-3%	6 ft	10	SF	\$120	\$1,152	
1352726	176.4 to 177.4 feet	Vertical Change	.3	6 ft	6	LF	\$75	\$450	
1352737	192.4 to 195.6 feet	Cross Slope (PAR)	2-3%	6 ft	19	SF	\$120	\$2,304	
1352727	207.7 to 208.7 feet	Vertical Change	.4	6 ft	6	LF	\$75	\$450	
1352738	241.2 to 256.7 feet	Cross Slope (PAR)	2-3%	6 ft	93	SF	\$120	\$11,160	
1352739	259.1 to 261.8 feet	Cross Slope (PAR)	2-3%	6 ft	16	SF	\$120	\$1,944	
1352740	269.8 to 275.4 feet	Cross Slope (PAR)	2-3%	6 ft	34	SF	\$120	\$4,032	
1352741	280.7 to 281.8 feet	Cross Slope (PAR)	2-3%	6 ft	7	SF	\$120	\$792	
1352728	284.7 to 285.7 feet	Vertical Change	.3	6 ft	6	LF	\$75	\$450	
1352742	24.9 to 25.9 feet	Vertical Change	.3	6 ft	6	LF	\$75	\$450	
1352752	46.0 to 49.0 feet	Cross Slope (PAR)	2-3%	6 ft	18	SF	\$120	\$2,160	
1352753	57.6 to 60.8 feet	Cross Slope (PAR)	2-3%	6 ft	19	SF	\$120	\$2,304	
1352754	102.1 to 104.0 feet	Cross Slope (PAR)	2-3%	6 ft	11	SF	\$120	\$1,368	
1352755	115.6 to 120.5 feet	Cross Slope (PAR)	2-3%	6 ft	29	SF	\$120	\$3,528	
1352743	129.7 to 130.7 feet	Vertical Change	.3	6 ft	6	LF	\$75	\$450	
1352756	133.0 to 137.0 feet	Cross Slope (PAR)	2-3%	6 ft	24	SF	\$120	\$2,880	
1352757	153.5 to 158.3 feet	Cross Slope (PAR)	2-3%	6 ft	29	SF	\$120	\$3,456	
1352744	162.2 to 163.2 feet	Vertical Change	.3	6 ft	6	LF	\$75	\$450	
1352745	170.3 to 171.3 feet	Vertical Change	.4	6 ft	6	LF	\$75	\$450	
1352746	178.4 to 179.4 feet	Vertical Change	.3	6 ft	6	LF	\$75	\$450	
1352747	211.0 to 212.0 feet	Vertical Change	.4	6 ft	6	LF	\$75	\$450	
1352758	217.7 to 239.4 feet	Cross Slope (PAR)	2-3%	6 ft	130	SF	\$120	\$15,624	
1352748	219.6 to 220.6 feet	Vertical Change	.3	6 ft	6	REF			
1352749	226.3 to 227.3 feet	Vertical Change	.3	6 ft	6	REF			
1352764	228.4 to 230.6 feet	Running Slope	5-6%	6 ft	13	REF			
1352765	235.7 to 249.2 feet	Running Slope	5-6%	6 ft	81	REF			
1352759	244.3 to 252.0 feet	Cross Slope (PAR)	2-3%	6 ft	46	SF	\$120	\$5,544	

Funding Source: TBD

Year to be Completed TBD

Direction Traveled	Run ID	Route	Start of Route	End of Route					Priority
NE	1904171117	ROUTE 35	AQUATIC CENTER	GYMNASIUM 8					112.5
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1352750	246.9 to 247.9 feet	Vertical Change	.3	6 ft	6	REF			
1352766	252.5 to 268.6 feet	Running Slope	5-6%	6 ft	97	SF	\$120	\$11,592	
1352751	289.1 to 290.1 feet	Vertical Change	.3	6 ft	6	LF	\$75	\$450	
1352760	291.8 to 295.5 feet	Cross Slope (PAR)	2-3%	6 ft	22	SF	\$120	\$2,664	
1352761	328.8 to 338.1 feet	Cross Slope (PAR)	2-3%	6 ft	56	SF	\$120	\$6,696	
1352762	338.1 to 348.3 feet	Cross Slope (PAR)	4-5%	6 ft	61	SF	\$120	\$7,344	
1352763	348.3 to 356.2 feet	Cross Slope (PAR)	2-3%	6 ft	47	SF	\$120	\$5,688	
1352767	6.3 to 8.3 feet	Cross Slope (PAR)	2-3%	6 ft	12	SF	\$120	\$1,440	
1352768	8.8 to 14.1 feet	Cross Slope (PAR)	4-5%	6 ft	32	SF	\$120	\$3,816	
1352769	19.1 to 27.8 feet	Cross Slope (PAR)	3-4%	6 ft	52	SF	\$120	\$6,264	
1352770	29.3 to 33.3 feet	Cross Slope (PAR)	2-3%	6 ft	24	SF	\$120	\$2,880	
1352774	41.9 to 46.6 feet	Running Slope	5-6%	6 ft	28	SF	\$120	\$3,384	
1352771	50.0 to 54.7 feet	Cross Slope (PAR)	2-3%	6 ft	28	SF	\$120	\$3,384	
1352772	57.8 to 60.6 feet	Cross Slope (PAR)	2-3%	6 ft	17	SF	\$120	\$2,016	
1352773	66.5 to 72.9 feet	Cross Slope (PAR)	2-3%	6 ft	38	SF	\$120	\$4,608	
1353264	64.1 to 65.1 feet	Vertical Change	.3	20 ft	20	LF	\$75	\$1,500	
1353265	137.9 to 138.9 feet	Vertical Change	.3	20 ft	20	LF	\$75	\$1,500	
1353267	156.7 to 161.2 feet	Cross Slope (PAR)	2-3%	20 ft	90	SF	\$120	\$10,800	
1353268	217.1 to 220.8 feet	Cross Slope (PAR)	2-3%	20 ft	74	SF	\$120	\$8,880	
1353266	265.5 to 266.5 feet	Vertical Change	.3	20 ft	20	LF	\$75	\$1,500	
1353281	0.2 to 1.5 feet	Cross Slope (PAR)	2-3%	20 ft	26	SF	\$120	\$3,120	
1353282	169.9 to 171.5 feet	Cross Slope (PAR)	2-3%	20 ft	32	SF	\$120	\$3,840	
1353283	174.9 to 176.2 feet	Cross Slope (PAR)	2-3%	20 ft	26	SF	\$120	\$3,120	
1353197	0.0 to 9.0 feet	Cross Slope (PAR)	2-3%	18 ft	165	SF	\$120	\$19,800	
1353198	28.8 to 30.3 feet	Cross Slope (PAR)	2-3%	18 ft	27	SF	\$120	\$3,300	
1353195	30.2 to 31.2 feet	Vertical Change	.3	18 ft	18	REF			
1353199	40.8 to 50.5 feet	Cross Slope (PAR)	2-3%	18 ft	178	SF	\$120	\$21,340	
1353201	59.3 to 60.4 feet	Running Slope	5-6%	18 ft	20	SF	\$120	\$2,420	

Funding Source: **TBD**Year to be Completed **TBD**

Direction Traveled	Run ID	Route	Start of Route	End of Route	Year to be Completed				Priority
SE	1904180936	ROUTE 39	EMERGING	COLLEGE CENTER 10					111.25
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1353200	135.3 to 136.3 feet	Cross Slope (PAR)	2-3%	18 ft	18	SF	\$120	\$2,200	
1353196	137.7 to 138.7 feet	Vertical Change	.3	18 ft	18	LF	\$75	\$1,375	
1353280	100.1 to 103.3 feet	Cross Slope (PAR)	2-3%	20 ft	64	SF	\$120	\$7,680	
1353278	131.7 to 132.7 feet	Vertical Change	.3	20 ft	20	LF	\$75	\$1,500	
1353279	212.0 to 213.0 feet	Vertical Change	.3	20 ft	20	LF	\$75	\$1,500	
1353219	0.0 to 2.3 feet	Cross Slope (PAR)	2-3%	18 ft	42	SF	\$120	\$5,060	
1353216	15.0 to 16.0 feet	Vertical Change	.3	18 ft	18	LF	\$75	\$1,375	
1353220	57.1 to 62.6 feet	Cross Slope (PAR)	2-3%	18 ft	101	SF	\$120	\$12,100	
1353221	66.1 to 97.8 feet	Cross Slope (PAR)	2-3%	18 ft	581	SF	\$120	\$69,739	
1353217	72.0 to 73.0 feet	Vertical Change	.3	18 ft	18	REF			
1353222	100.8 to 104.0 feet	Cross Slope (PAR)	2-3%	18 ft	59	SF	\$120	\$7,040	
1353218	121.9 to 122.9 feet	Vertical Change	.3	18 ft	18	LF	\$75	\$1,375	
1353223	175.0 to 176.6 feet	Cross Slope (PAR)	2-3%	18 ft	29	SF	\$120	\$3,520	
1353224	180.9 to 182.3 feet	Cross Slope (PAR)	2-3%	18 ft	26	SF	\$120	\$3,080	
1353225	188.0 to 190.0 feet	Cross Slope (PAR)	2-3%	18 ft	37	SF	\$120	\$4,400	
1353226	199.4 to 206.5 feet	Cross Slope (PAR)	2-3%	18 ft	130	SF	\$120	\$15,620	
1353227	237.0 to 238.8 feet	Cross Slope (PAR)	2-3%	18 ft	33	SF	\$120	\$3,960	
1353228	293.3 to 299.3 feet	Cross Slope (PAR)	2-3%	18 ft	110	SF	\$120	\$13,200	
1353229	308.9 to 316.0 feet	Cross Slope (PAR)	2-3%	18 ft	130	SF	\$120	\$15,620	
1353230	369.3 to 370.3 feet	Cross Slope (PAR)	2-3%	18 ft	18	SF	\$120	\$2,200	
1353231	374.5 to 376.3 feet	Cross Slope (PAR)	2-3%	18 ft	33	SF	\$120	\$3,960	
1353232	389.4 to 391.3 feet	Cross Slope (PAR)	2-3%	18 ft	35	SF	\$120	\$4,180	
1353233	396.3 to 402.4 feet	Cross Slope (PAR)	2-3%	18 ft	112	SF	\$120	\$13,420	
1353234	426.4 to 430.4 feet	Cross Slope (PAR)	2-3%	18 ft	73	SF	\$120	\$8,800	
1353235	41.5 to 42.5 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1353236	64.6 to 65.6 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1353242	72.1 to 79.7 feet	Cross Slope (PAR)	2-3%	8 ft	61	SF	\$120	\$7,296	
1353237	81.1 to 82.1 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	

Funding Source: **TBD**Year to be Completed **TBD**

Direction Traveled	Run ID	Route	Start of Route	End of Route					Priority
NW	1904180948	ROUTE 43	SOUTH HALL 14	CENTRAL HALL 16					110
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1353243	84.5 to 87.1 feet	Cross Slope (PAR)	2-3%	8 ft	21	SF	\$120	\$2,496	
1353244	112.0 to 113.0 feet	Cross Slope (PAR)	3-4%	8 ft	8	SF	\$120	\$960	
1353238	113.9 to 114.9 feet	Vertical Change	.4	8 ft	8	LF	\$75	\$600	
1353245	116.5 to 117.8 feet	Cross Slope (PAR)	2-3%	8 ft	10	SF	\$120	\$1,248	
1353246	121.3 to 123.3 feet	Cross Slope (PAR)	2-3%	8 ft	16	SF	\$120	\$1,920	
1353239	130.3 to 131.3 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1353247	133.2 to 134.4 feet	Cross Slope (PAR)	2-3%	8 ft	10	SF	\$120	\$1,152	
1353248	137.7 to 139.0 feet	Cross Slope (PAR)	2-3%	8 ft	10	SF	\$120	\$1,248	
1353249	145.8 to 157.8 feet	Cross Slope (PAR)	2-3%	8 ft	96	SF	\$120	\$11,520	
1353240	146.8 to 147.8 feet	Vertical Change	.4	8 ft	8	REF			
1353250	162.1 to 165.8 feet	Cross Slope (PAR)	2-3%	8 ft	30	SF	\$120	\$3,552	
1353241	163.3 to 164.3 feet	Vertical Change	.3	8 ft	8	REF			
1353251	170.4 to 172.5 feet	Cross Slope (PAR)	2-3%	8 ft	17	SF	\$120	\$2,016	
1353252	178.6 to 190.3 feet	Cross Slope (PAR)	2-3%	8 ft	94	SF	\$120	\$11,232	
1353253	194.0 to 195.6 feet	Cross Slope (PAR)	2-3%	8 ft	13	SF	\$120	\$1,536	
1353254	216.1 to 218.7 feet	Cross Slope (PAR)	2-3%	8 ft	21	SF	\$120	\$2,496	
1353255	220.9 to 224.6 feet	Cross Slope (PAR)	2-3%	8 ft	30	SF	\$120	\$3,552	
1353256	232.8 to 237.0 feet	Cross Slope (PAR)	2-3%	8 ft	34	SF	\$120	\$4,032	
1353257	239.5 to 240.6 feet	Cross Slope (PAR)	2-3%	8 ft	9	SF	\$120	\$1,056	
1353258	247.4 to 248.5 feet	Cross Slope (PAR)	3-4%	8 ft	9	SF	\$120	\$1,056	
1353259	250.2 to 251.6 feet	Cross Slope (PAR)	2-3%	8 ft	11	SF	\$120	\$1,344	
1353260	254.5 to 262.6 feet	Cross Slope (PAR)	2-3%	8 ft	65	SF	\$120	\$7,776	
1353261	332.2 to 333.3 feet	Cross Slope (PAR)	2-3%	8 ft	9	SF	\$120	\$1,056	
1353262	342.8 to 343.9 feet	Cross Slope (PAR)	2-3%	8 ft	9	SF	\$120	\$1,056	
1353263	358.3 to 366.2 feet	Cross Slope (PAR)	2-3%	8 ft	63	SF	\$120	\$7,584	
1353164	0.3 to 4.6 feet	Cross Slope (PAR)	2-3%	8 ft	34	SF	\$120	\$4,128	
1353165	65.9 to 67.9 feet	Cross Slope (PAR)	2-3%	8 ft	16	SF	\$120	\$1,920	
1353169	92.1 to 94.4 feet	Running Slope	5-6%	8 ft	18	SF	\$120	\$2,208	

Funding Source: **TBD**Year to be Completed **TBD**

Direction Traveled	Run ID	Route	Start of Route	End of Route					Priority
SW	1904180908	ROUTE 44	NORTH HALL 18	NORTH HALL 18					111.25
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1353166	94.4 to 97.8 feet	Cross Slope (PAR)	2-3%	8 ft	27	SF	\$120	\$3,264	
1353162	97.1 to 98.1 feet	Vertical Change	.3	8 ft	8	REF			
1353170	97.4 to 98.5 feet	Running Slope	5-6%	8 ft	9	REF			
1353167	101.8 to 103.9 feet	Cross Slope (PAR)	2-3%	8 ft	17	SF	\$120	\$2,016	
1353168	107.6 to 115.3 feet	Cross Slope (PAR)	2-3%	8 ft	62	SF	\$120	\$7,392	
1353171	109.2 to 110.2 feet	Running Slope	5-6%	8 ft	8	REF			
1353163	115.3 to 116.3 feet	Vertical Change	.3	8 ft	8	REF			
1353142	5.7 to 9.5 feet	Cross Slope (PAR)	2-3%	19 ft	71	SF	\$120	\$8,512	
1353155	16.2 to 22.4 feet	Running Slope	9-10%	19 ft	116	SF	\$120	\$13,888	
1353156	23.8 to 25.8 feet	Running Slope	7-8%	19 ft	37	SF	\$120	\$4,480	
1353143	26.7 to 36.0 feet	Cross Slope (PAR)	2-3%	19 ft	174	SF	\$120	\$20,832	
1353157	27.7 to 28.8 feet	Running Slope	5-6%	19 ft	21	REF			
1353138	74.8 to 75.8 feet	Vertical Change	.3	19 ft	19	LF	\$75	\$1,400	
1353144	80.3 to 88.0 feet	Cross Slope (PAR)	2-3%	19 ft	144	SF	\$120	\$17,248	
1353139	86.9 to 87.9 feet	Vertical Change	.3	19 ft	19	REF			
1353158	91.1 to 94.0 feet	Running Slope	6-7%	19 ft	54	SF	\$120	\$6,496	
1353159	94.0 to 96.3 feet	Running Slope	5-6%	19 ft	43	SF	\$120	\$5,152	
1353160	102.3 to 111.9 feet	Running Slope	5-6%	19 ft	179	SF	\$120	\$21,504	
1353145	111.5 to 112.8 feet	Cross Slope (PAR)	2-3%	19 ft	24	SF	\$120	\$2,912	
1353140	117.0 to 118.0 feet	Vertical Change	.3	19 ft	19	LF	\$75	\$1,400	
1353161	117.4 to 118.4 feet	Running Slope	5-6%	19 ft	19	SF	\$120	\$2,240	
1353146	123.1 to 124.5 feet	Cross Slope (PAR)	2-3%	19 ft	26	SF	\$120	\$3,136	
1353147	127.6 to 128.8 feet	Cross Slope (PAR)	3-4%	19 ft	22	SF	\$120	\$2,688	
1353141	140.5 to 141.5 feet	Vertical Change	.4	19 ft	19	LF	\$75	\$1,400	
1353148	149.9 to 160.6 feet	Cross Slope (PAR)	2-3%	19 ft	200	SF	\$120	\$23,968	
1353149	167.7 to 168.9 feet	Cross Slope (PAR)	2-3%	19 ft	22	SF	\$120	\$2,688	
1353150	181.3 to 182.7 feet	Cross Slope (PAR)	2-3%	19 ft	26	SF	\$120	\$3,136	
1353151	189.2 to 193.1 feet	Cross Slope (PAR)	2-3%	19 ft	73	SF	\$120	\$8,736	

Funding Source: **TBD**Year to be Completed **TBD**

Direction Traveled	Run ID	Route	Start of Route	End of Route	Year to be Completed				Priority
NW	1904180904	ROUTE 45	CENTRAL HALL 16	NORTH HALL 18					115
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1353152	236.0 to 237.2 feet	Cross Slope (PAR)	2-3%	19 ft	22	SF	\$120	\$2,688	
1353153	238.6 to 244.4 feet	Cross Slope (PAR)	4-5%	19 ft	108	SF	\$120	\$12,992	
1353154	244.6 to 248.1 feet	Cross Slope (PAR)	2-3%	19 ft	65	SF	\$120	\$7,840	
1353174	0.0 to 3.2 feet	Cross Slope (PAR)	4-5%	8 ft	26	SF	\$120	\$3,072	
1353172	6.2 to 7.2 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1353180	25.8 to 29.3 feet	Running Slope	5-6%	8 ft	28	SF	\$120	\$3,360	
1353175	33.4 to 39.0 feet	Cross Slope (PAR)	2-3%	8 ft	45	SF	\$120	\$5,376	
1353181	33.8 to 36.0 feet	Running Slope	5-6%	8 ft	18	REF			
1353176	41.8 to 48.4 feet	Cross Slope (PAR)	4-5%	8 ft	53	SF	\$120	\$6,336	
1353182	45.1 to 46.2 feet	Running Slope	5-6%	8 ft	9	REF			
1353177	48.4 to 54.8 feet	Cross Slope (PAR)	2-3%	8 ft	51	SF	\$120	\$6,144	
1353183	49.4 to 53.4 feet	Running Slope	5-6%	8 ft	32	REF			
1353173	70.9 to 71.9 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1353178	104.9 to 106.3 feet	Cross Slope (PAR)	2-3%	8 ft	11	SF	\$120	\$1,344	
1353179	131.9 to 133.1 feet	Cross Slope (PAR)	2-3%	8 ft	10	SF	\$120	\$1,152	
1353184	143.5 to 144.7 feet	Running Slope	5-6%	8 ft	10	SF	\$120	\$1,152	
1353186	52.1 to 53.1 feet	Vertical Change	1.1	18 ft	18	SF	\$75	\$1,375	
1353187	139.7 to 140.7 feet	Cross Slope (PAR)	2-3%	18 ft	18	SF	\$120	\$2,200	
1353185	85.1 to 86.1 feet	Vertical Change	.4	8 ft	8	LF	\$75	\$600	
1353116	0.0 to 3.7 feet	Cross Slope (PAR)	5-6%	5 ft	19	SF	\$120	\$2,220	
1353117	3.7 to 5.2 feet	Cross Slope (PAR)	3-4%	5 ft	8	SF	\$120	\$900	
1353118	5.2 to 6.4 feet	Cross Slope (PAR)	2-3%	5 ft	6	SF	\$120	\$720	
1353113	12.3 to 13.3 feet	Vertical Change	.3	5 ft	5	LF	\$75	\$375	
1353114	27.0 to 28.0 feet	Vertical Change	.3	5 ft	5	LF	\$75	\$375	
1353119	79.2 to 87.3 feet	Cross Slope (PAR)	2-3%	5 ft	41	SF	\$120	\$4,860	
1353123	119.0 to 120.2 feet	Running Slope	5-6%	5 ft	6	SF	\$120	\$720	
1353124	123.4 to 129.5 feet	Running Slope	5-6%	5 ft	31	SF	\$120	\$3,660	
1353115	151.3 to 152.3 feet	Vertical Change	.3	5 ft	5	LF	\$75	\$375	

Funding Source: **TBD**Year to be Completed **TBD**

Direction Traveled	Run ID	Route	Start of Route	End of Route	Year to be Completed				Priority
SE	1904180856	ROUTE 49	EMERGING	BUILDING 17					120
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1353120	156.9 to 158.8 feet	Cross Slope (PAR)	2-3%	5 ft	10	SF	\$120	\$1,140	
1353121	162.5 to 169.2 feet	Cross Slope (PAR)	2-3%	5 ft	34	SF	\$120	\$4,020	
1353125	165.2 to 167.3 feet	Running Slope	5-6%	5 ft	11	REF			
1353126	196.1 to 203.8 feet	Running Slope	6-7%	5 ft	39	SF	\$120	\$4,620	
1353127	203.8 to 207.3 feet	Running Slope	5-6%	5 ft	18	SF	\$120	\$2,100	
1353128	212.7 to 214.6 feet	Running Slope	5-6%	5 ft	10	SF	\$120	\$1,140	
1353122	215.6 to 216.8 feet	Cross Slope (PAR)	2-3%	5 ft	6	SF	\$120	\$720	
1353100	23.5 to 28.5 feet	Cross Slope (PAR)	2-3%	5 ft	25	SF	\$120	\$3,000	
1353109	32.3 to 33.5 feet	Running Slope	5-6%	5 ft	6	SF	\$120	\$720	
1353110	36.3 to 37.8 feet	Running Slope	5-6%	5 ft	8	SF	\$120	\$900	
1353111	37.8 to 39.0 feet	Running Slope	6-7%	5 ft	6	SF	\$120	\$720	
1353112	39.0 to 40.4 feet	Running Slope	5-6%	5 ft	7	SF	\$120	\$840	
1353101	45.8 to 47.2 feet	Cross Slope (PAR)	2-3%	5 ft	7	SF	\$120	\$840	
1353102	52.5 to 57.8 feet	Cross Slope (PAR)	2-3%	5 ft	27	SF	\$120	\$3,180	
1353103	58.4 to 61.8 feet	Cross Slope (PAR)	4-5%	5 ft	17	SF	\$120	\$2,040	
1353104	65.2 to 66.2 feet	Cross Slope (PAR)	2-3%	5 ft	5	SF	\$120	\$600	
1353105	73.4 to 75.2 feet	Cross Slope (PAR)	2-3%	5 ft	9	SF	\$120	\$1,080	
1353099	78.6 to 79.6 feet	Vertical Change	.4	5 ft	5	LF	\$75	\$375	
1353106	83.7 to 85.4 feet	Cross Slope (PAR)	2-3%	5 ft	9	SF	\$120	\$1,020	
1353107	89.4 to 92.6 feet	Cross Slope (PAR)	2-3%	5 ft	16	SF	\$120	\$1,920	
1353108	100.8 to 110.8 feet	Cross Slope (PAR)	2-3%	5 ft	50	SF	\$120	\$6,000	
1353054	72.8 to 75.9 feet	Cross Slope (PAR)	2-3%	8 ft	25	SF	\$120	\$2,976	
1353055	78.0 to 79.3 feet	Cross Slope (PAR)	3-4%	8 ft	10	SF	\$120	\$1,248	
1353056	82.1 to 83.3 feet	Cross Slope (PAR)	5-6%	8 ft	10	SF	\$120	\$1,152	
1353057	85.1 to 86.2 feet	Cross Slope (PAR)	2-3%	8 ft	9	SF	\$120	\$1,056	
1353063	86.5 to 87.5 feet	Protruding Object	60"	8 ft	8	JOB	\$225	\$225	
1353064	86.9 to 88.6 feet	Running Slope	5-6%	8 ft	14	SF	\$120	\$1,632	
1353065	90.6 to 92.7 feet	Running Slope	6-7%	8 ft	17	SF	\$120	\$2,016	

Funding Source: TBD

Year to be Completed TBD

Direction Traveled	Run ID	Route	Start of Route	End of Route						Priority
S	1904180835	ROUTE 52	SCIENCE BUILDING 36	SCIENCE BUILDING 36						153
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total		
1353066	99.1 to 101.8 feet	Running Slope	5-6%	8 ft	22	SF	\$120	\$2,592		
1353067	106.9 to 111.2 feet	Running Slope	5-6%	8 ft	34	SF	\$120	\$4,128		
1353068	127.2 to 130.0 feet	Running Slope	5-6%	8 ft	22	SF	\$120	\$2,688		
1353069	132.8 to 134.3 feet	Running Slope	5-6%	8 ft	12	SF	\$120	\$1,440		
1353070	134.3 to 136.0 feet	Running Slope	6-7%	8 ft	14	SF	\$120	\$1,632		
1353071	136.0 to 142.1 feet	Running Slope	5-6%	8 ft	49	SF	\$120	\$5,856		
1353035	149.7 to 150.7 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600		
1353058	153.5 to 159.3 feet	Cross Slope (PAR)	2-3%	8 ft	46	SF	\$120	\$5,568		
1353059	164.1 to 170.0 feet	Cross Slope (PAR)	2-3%	8 ft	47	SF	\$120	\$5,664		
1353086	165.8 to 166.8 feet	Walkway Surface		8 ft	8	SF	\$120	\$960		
1353072	168.4 to 170.6 feet	Running Slope	5-6%	8 ft	18	REF				
1353036	171.6 to 172.6 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600		
1353073	172.3 to 173.6 feet	Running Slope	6-7%	8 ft	10	SF	\$120	\$1,248		
1353037	173.9 to 174.9 feet	Vertical Change	3.3	8 ft	8	SF	\$75	\$600		
1353038	176.2 to 177.2 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600		
1353039	179.6 to 180.6 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600		
1353040	183.7 to 184.7 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600		
1353087	184.9 to 185.9 feet	Walkway Surface		8 ft	8	SF	\$120	\$960		
1353041	186.5 to 187.5 feet	Vertical Change	2.8	8 ft	8	SF	\$75	\$600		
1353074	188.4 to 189.8 feet	Running Slope	8-9%	8 ft	11	SF	\$120	\$1,344		
1353042	188.6 to 189.6 feet	Vertical Change	.7	8 ft	8	SF	\$75	\$600		
1353043	190.4 to 191.4 feet	Vertical Change	1.2	8 ft	8	SF	\$75	\$600		
1353044	192.8 to 207.4 feet	Vertical Change	.3	8 ft	117	LF	\$75	\$8,760		
1353075	195.6 to 196.7 feet	Running Slope	7-8%	8 ft	9	SF	\$120	\$1,056		
1353088	204.3 to 205.3 feet	Walkway Surface		8 ft	8	SF	\$120	\$960		
1353076	209.3 to 212.9 feet	Running Slope	8-9%	8 ft	29	SF	\$120	\$3,456		
1353045	215.7 to 216.7 feet	Vertical Change	.4	8 ft	8	LF	\$75	\$600		
1353060	220.3 to 223.3 feet	Cross Slope (PAR)	2-3%	8 ft	24	SF	\$120	\$2,880		

Funding Source: TBD

Year to be Completed TBD

Direction Traveled	Run ID	Route	Start of Route	End of Route					Priority
S	1904180835	ROUTE 52	SCIENCE BUILDING 36	SCIENCE BUILDING 36					153
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1353046	234.9 to 235.9 feet	Vertical Change	.4	8 ft	8	LF	\$75	\$600	
1353077	237.1 to 238.8 feet	Running Slope	8-9%	8 ft	14	SF	\$120	\$1,632	
1353078	241.2 to 255.2 feet	Running Slope	8-9%	8 ft	112	SF	\$120	\$13,440	
1353079	256.1 to 257.3 feet	Running Slope	5-6%	8 ft	10	SF	\$120	\$1,152	
1353080	272.8 to 277.0 feet	Running Slope	9-10%	8 ft	34	SF	\$120	\$4,032	
1353081	277.0 to 280.8 feet	Running Slope	7-8%	8 ft	30	SF	\$120	\$3,648	
1353082	282.9 to 291.2 feet	Running Slope	7-8%	8 ft	66	SF	\$120	\$7,968	
1353047	290.3 to 291.3 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1353048	293.7 to 294.7 feet	Vertical Change	.4	8 ft	8	LF	\$75	\$600	
1353083	298.8 to 300.5 feet	Running Slope	5-6%	8 ft	14	SF	\$120	\$1,632	
1353049	301.8 to 302.8 feet	Vertical Change	.5	8 ft	8	LF	\$75	\$600	
1353089	305.8 to 306.8 feet	Walkway Surface		8 ft	8	SF	\$120	\$960	
1353050	309.2 to 310.2 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1353084	311.3 to 312.4 feet	Running Slope	7-8%	8 ft	9	SF	\$120	\$1,056	
1353051	312.9 to 316.7 feet	Vertical Change	.3	8 ft	30	LF	\$75	\$2,280	
1353052	319.4 to 322.6 feet	Vertical Change	.3	8 ft	26	LF	\$75	\$1,920	
1353085	326.4 to 327.8 feet	Running Slope	6-7%	8 ft	11	SF	\$120	\$1,344	
1353053	329.3 to 335.8 feet	Vertical Change	.3	8 ft	52	LF	\$75	\$3,900	
1353061	335.4 to 341.5 feet	Cross Slope (PAR)	2-3%	8 ft	49	SF	\$120	\$5,856	
1353062	341.7 to 346.9 feet	Cross Slope (PAR)	4-5%	8 ft	42	SF	\$120	\$4,992	
1353090	0.5 to 2.8 feet	Cross Slope (PAR)	2-3%	5 ft	12	SF	\$120	\$1,380	
1353095	1.0 to 2.8 feet	Running Slope	5-6%	5 ft	9	REF			
1353091	8.5 to 11.1 feet	Cross Slope (PAR)	2-3%	5 ft	13	SF	\$120	\$1,560	
1353092	11.1 to 15.9 feet	Cross Slope (PAR)	4-5%	5 ft	24	SF	\$120	\$2,880	
1353093	18.1 to 21.8 feet	Cross Slope (PAR)	2-3%	5 ft	18	SF	\$120	\$2,220	
1353094	25.6 to 33.8 feet	Cross Slope (PAR)	2-3%	5 ft	41	SF	\$120	\$4,920	
1353096	30.2 to 31.2 feet	Running Slope	5-6%	5 ft	5	REF			
1353097	37.0 to 41.2 feet	Running Slope	5-6%	5 ft	21	SF	\$120	\$2,520	

Funding Source: TBD

Year to be Completed TBD

Direction Traveled	Run ID	Route	Start of Route	End of Route	Priority				
E	1904180844	ROUTE 53	SCIENCE BUILDING 36	EMERGING TECHNOLOGIES 19	112.5				
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1353098	52.4 to 55.8 feet	Running Slope	5-6%	5 ft	17	SF	\$120	\$2,040	
1353018	0.0 to 3.2 feet	Running Slope	7-8%	12 ft	38	REF			
1353012	0.3 to 4.7 feet	Cross Slope (PAR)	2-3%	12 ft	53	SF	\$120	\$6,336	
1353019	3.2 to 4.7 feet	Running Slope	5-6%	12 ft	18	REF			
1353020	7.8 to 12.0 feet	Running Slope	5-6%	12 ft	50	SF	\$120	\$6,048	
1353007	14.9 to 15.9 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900	
1353013	25.7 to 39.4 feet	Cross Slope (PAR)	2-3%	12 ft	164	SF	\$120	\$19,728	
1353008	36.6 to 37.6 feet	Vertical Change	.3	12 ft	12	REF			
1353021	46.3 to 47.3 feet	Running Slope	5-6%	12 ft	12	SF	\$120	\$1,440	
1353022	47.3 to 48.5 feet	Running Slope	6-7%	12 ft	14	SF	\$120	\$1,728	
1353009	47.7 to 48.7 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900	
1353023	48.5 to 50.7 feet	Running Slope	5-6%	12 ft	26	SF	\$120	\$3,168	
1353014	51.2 to 61.9 feet	Cross Slope (PAR)	2-3%	12 ft	128	SF	\$120	\$15,408	
1353024	70.7 to 71.8 feet	Running Slope	5-6%	12 ft	13	SF	\$120	\$1,584	
1353010	80.4 to 81.4 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900	
1353015	95.0 to 97.3 feet	Cross Slope (PAR)	2-3%	12 ft	28	SF	\$120	\$3,312	
1353016	101.8 to 107.4 feet	Cross Slope (PAR)	2-3%	12 ft	67	SF	\$120	\$8,064	
1353025	102.8 to 105.1 feet	Running Slope	6-7%	12 ft	28	REF			
1353026	105.1 to 107.7 feet	Running Slope	5-6%	12 ft	31	REF			
1353017	182.8 to 183.8 feet	Cross Slope (PAR)	2-3%	12 ft	12	SF	\$120	\$1,440	
1353011	201.0 to 202.0 feet	Vertical Change	.3	12 ft	12	LF	\$75	\$900	
1353029	51.2 to 54.9 feet	Cross Slope (PAR)	2-3%	8 ft	30	SF	\$120	\$3,552	
1353030	58.2 to 67.0 feet	Cross Slope (PAR)	2-3%	8 ft	70	SF	\$120	\$8,448	
1353031	70.5 to 80.3 feet	Cross Slope (PAR)	3-4%	8 ft	78	SF	\$120	\$9,408	
1353032	91.2 to 128.2 feet	Cross Slope (PAR)	2-3%	8 ft	296	SF	\$120	\$35,520	
1353027	119.0 to 120.0 feet	Vertical Change	.3	8 ft	8	REF			
1353028	129.4 to 130.4 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1353033	136.8 to 171.2 feet	Cross Slope (PAR)	2-3%	8 ft	275	SF	\$120	\$33,024	

Funding Source: TBD

Year to be Completed TBD

Direction Traveled	Run ID	Route	Start of Route	End of Route					Priority
N / S	1904180830	ROUTE 56	PLANETARIUM	PLANETARIUM					111.25
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1353034	199.8 to 201.6 feet	Running Slope	5-6%	8 ft	14	SF	\$120	\$1,728	
1353001	0.0 to 2.3 feet	Running Slope	8-9%	8 ft	18	REF			
1352993	0.1 to 3.3 feet	Cross Slope (PAR)	2-3%	8 ft	26	SF	\$120	\$3,072	
1353002	3.1 to 4.9 feet	Running Slope	5-6%	8 ft	14	REF			
1352994	9.4 to 19.3 feet	Cross Slope (PAR)	2-3%	8 ft	79	SF	\$120	\$9,504	
1352995	21.6 to 38.3 feet	Cross Slope (PAR)	2-3%	8 ft	134	SF	\$120	\$16,032	
1353003	24.3 to 28.3 feet	Running Slope	5-6%	8 ft	32	REF			
1352996	40.7 to 49.6 feet	Cross Slope (PAR)	2-3%	8 ft	71	SF	\$120	\$8,544	
1353004	83.8 to 87.8 feet	Running Slope	5-6%	8 ft	32	REF			
1352997	85.0 to 94.9 feet	Cross Slope (PAR)	2-3%	8 ft	79	SF	\$120	\$9,504	
1352998	99.4 to 109.8 feet	Cross Slope (PAR)	2-3%	8 ft	83	SF	\$120	\$9,984	
1353005	102.1 to 106.8 feet	Running Slope	5-6%	8 ft	38	REF			
1353006	110.8 to 113.2 feet	Running Slope	5-6%	8 ft	19	SF	\$120	\$2,304	
1352999	128.4 to 130.8 feet	Cross Slope (PAR)	2-3%	8 ft	19	SF	\$120	\$2,304	
1353000	140.5 to 142.8 feet	Cross Slope (PAR)	2-3%	8 ft	18	SF	\$120	\$2,208	
1352980	0.5 to 2.7 feet	Running Slope	8-9%	8 ft	18	SF	\$120	\$2,112	
1352970	3.4 to 4.5 feet	Cross Slope (PAR)	2-3%	8 ft	9	SF	\$120	\$1,056	
1352981	3.4 to 7.7 feet	Running Slope	5-6%	8 ft	34	REF			
1352971	8.3 to 23.9 feet	Cross Slope (PAR)	2-3%	8 ft	125	SF	\$120	\$14,976	
1352964	18.4 to 19.4 feet	Vertical Change	.3	8 ft	8	REF			
1352972	29.3 to 43.6 feet	Cross Slope (PAR)	2-3%	8 ft	114	SF	\$120	\$13,728	
1352982	33.3 to 36.3 feet	Running Slope	5-6%	8 ft	24	REF			
1352965	45.2 to 46.2 feet	Vertical Change	.3	8 ft	8	REF			
1352973	46.0 to 72.7 feet	Cross Slope (PAR)	2-3%	8 ft	214	SF	\$120	\$25,632	
1352966	72.4 to 73.4 feet	Vertical Change	.3	8 ft	8	REF			
1352974	75.8 to 77.0 feet	Cross Slope (PAR)	3-4%	8 ft	10	SF	\$120	\$1,152	
1352975	77.0 to 84.2 feet	Cross Slope (PAR)	2-3%	8 ft	58	SF	\$120	\$6,912	
1352967	85.8 to 86.8 feet	Vertical Change	.4	8 ft	8	REF			

Funding Source: **TBD**Year to be Completed **TBD**

Direction Traveled	Run ID	Route	Start of Route	End of Route	Year to be Completed				Priority
SE	1904180812	ROUTE 58	GALILEO LOT 6	GALILEO LOT 6					113.75
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1352976	86.7 to 88.0 feet	Cross Slope (PAR)	3-4%	8 ft	10	SF	\$120	\$1,248	
1352977	91.9 to 95.6 feet	Cross Slope (PAR)	3-4%	8 ft	30	SF	\$120	\$3,552	
1352978	95.6 to 100.3 feet	Cross Slope (PAR)	2-3%	8 ft	38	SF	\$120	\$4,512	
1352968	99.3 to 100.3 feet	Vertical Change	.3	8 ft	8	REF			
1352979	104.9 to 117.9 feet	Cross Slope (PAR)	2-3%	8 ft	104	SF	\$120	\$12,480	
1352969	106.1 to 107.1 feet	Vertical Change	.3	8 ft	8	REF			
1352983	32.6 to 33.6 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1352984	75.3 to 76.3 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1352985	86.0 to 87.0 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1352990	2.3 to 4.8 feet	Cross Slope (PAR)	3-4%	8 ft	20	SF	\$120	\$2,400	
1352991	5.8 to 7.1 feet	Cross Slope (PAR)	2-3%	8 ft	10	SF	\$120	\$1,248	
1352992	20.1 to 21.5 feet	Cross Slope (PAR)	2-3%	8 ft	11	SF	\$120	\$1,344	
1352989	44.7 to 45.7 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1352986	0.2 to 3.9 feet	Cross Slope (PAR)	3-4%	8 ft	30	SF	\$120	\$3,552	
1352987	29.1 to 34.6 feet	Cross Slope (PAR)	2-3%	8 ft	44	SF	\$120	\$5,280	
1352988	38.3 to 40.6 feet	Running Slope	5-6%	8 ft	18	SF	\$120	\$2,208	
1352952	23.7 to 28.0 feet	Cross Slope (PAR)	2-3%	8 ft	34	SF	\$120	\$4,128	
1352953	32.2 to 66.4 feet	Cross Slope (PAR)	2-3%	8 ft	274	SF	\$120	\$32,832	
1352946	41.6 to 42.6 feet	Vertical Change	.3	8 ft	8	REF			
1352947	61.3 to 62.3 feet	Vertical Change	.3	8 ft	8	REF			
1352954	70.2 to 90.2 feet	Cross Slope (PAR)	2-3%	8 ft	160	SF	\$120	\$19,200	
1352948	74.4 to 75.4 feet	Vertical Change	.3	8 ft	8	REF			
1352955	93.8 to 146.0 feet	Cross Slope (PAR)	2-3%	8 ft	418	SF	\$120	\$50,112	
1352956	148.7 to 183.2 feet	Cross Slope (PAR)	2-3%	8 ft	276	SF	\$120	\$33,120	
1352949	168.3 to 169.3 feet	Vertical Change	.3	8 ft	8	REF			
1352957	186.8 to 191.1 feet	Cross Slope (PAR)	2-3%	8 ft	34	SF	\$120	\$4,128	
1352950	188.6 to 189.6 feet	Vertical Change	.3	8 ft	8	REF			
1352951	195.5 to 196.5 feet	Vertical Change	.3	8 ft	8	REF			

Funding Source: TBD

Year to be Completed TBD

Direction Traveled	Run ID	Route	Start of Route	End of Route					Priority
N / E	1904180805	ROUTE 66	GALILEO LOT 6	GALILEO LOT 6					111.25
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1352958	195.8 to 199.3 feet	Cross Slope (PAR)	2-3%	8 ft	28	SF	\$120	\$3,360	
1352959	200.7 to 203.1 feet	Running Slope	5-6%	8 ft	19	SF	\$120	\$2,304	
1352963	48.6 to 49.6 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1352936	25.3 to 35.1 feet	Cross Slope (PAR)	2-3%	8 ft	78	SF	\$120	\$9,408	
1352923	38.6 to 39.6 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1352937	43.7 to 45.3 feet	Cross Slope (PAR)	2-3%	8 ft	13	SF	\$120	\$1,536	
1352924	47.8 to 48.8 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1352925	66.3 to 67.3 feet	Vertical Change	.5	8 ft	8	LF	\$75	\$600	
1352926	75.3 to 76.3 feet	Vertical Change	.4	8 ft	8	LF	\$75	\$600	
1352927	84.2 to 85.2 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1352938	92.6 to 93.6 feet	Cross Slope (PAR)	2-3%	8 ft	8	SF	\$120	\$960	
1352939	97.3 to 98.4 feet	Cross Slope (PAR)	2-3%	8 ft	9	SF	\$120	\$1,056	
1352928	112.5 to 113.5 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1352940	132.5 to 136.3 feet	Cross Slope (PAR)	2-3%	8 ft	30	SF	\$120	\$3,648	
1352929	147.4 to 148.4 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1352930	156.4 to 157.4 feet	Vertical Change	.4	8 ft	8	LF	\$75	\$600	
1352931	183.4 to 184.4 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1352932	209.1 to 210.1 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1352933	219.5 to 220.5 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1352934	228.5 to 229.5 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1352941	240.9 to 244.3 feet	Cross Slope (PAR)	2-3%	8 ft	27	SF	\$120	\$3,264	
1352935	264.6 to 265.6 feet	Vertical Change	.3	8 ft	8	LF	\$75	\$600	
1353284	21.6 to 22.6 feet	Vertical Change	.3	6 ft	6	LF	\$75	\$450	
1352681	41.8 to 46.1 feet	Cross Slope (PAR)	2-3%	6 ft	26	SF	\$120	\$3,096	
1352682	63.8 to 68.0 feet	Cross Slope (PAR)	2-3%	6 ft	25	SF	\$120	\$3,024	
1352683	77.1 to 79.3 feet	Cross Slope (PAR)	2-3%	6 ft	13	SF	\$120	\$1,584	
1352697	4.1 to 5.1 feet	Vertical Change	.3	6 ft	6	LF	\$75	\$450	
1352698	47.1 to 48.3 feet	Cross Slope (PAR)	2-3%	6 ft	7	SF	\$120	\$864	

Funding Source: **TBD**Year to be Completed **TBD**

Direction Traveled	Run ID	Route	Start of Route	End of Route					Priority
SW	1904171015	ROUTE 81	CSM DRIVE	BEETHOVEN LOT 2					111.25
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1352699	58.3 to 59.5 feet	Cross Slope (PAR)	2-3%	6 ft	7	SF	\$120	\$864	
1352700	62.0 to 63.8 feet	Cross Slope (PAR)	2-3%	6 ft	11	SF	\$120	\$1,296	
1352701	98.8 to 100.9 feet	Cross Slope (PAR)	2-3%	6 ft	13	SF	\$120	\$1,512	
1352702	106.5 to 110.3 feet	Cross Slope (PAR)	2-3%	6 ft	23	SF	\$120	\$2,736	
1352703	125.3 to 128.2 feet	Cross Slope (PAR)	2-3%	6 ft	17	SF	\$120	\$2,088	
1352704	131.0 to 145.2 feet	Cross Slope (PAR)	2-3%	6 ft	85	SF	\$120	\$10,224	
1352705	158.3 to 166.9 feet	Cross Slope (PAR)	2-3%	6 ft	52	SF	\$120	\$6,192	
1352706	171.4 to 174.8 feet	Cross Slope (PAR)	2-3%	6 ft	20	SF	\$120	\$2,448	
1352707	230.3 to 231.6 feet	Running Slope	5-6%	6 ft	8	SF	\$120	\$936	
1352708	231.6 to 232.7 feet	Running Slope	6-7%	6 ft	7	SF	\$120	\$792	
1352695	0.0 to 1.6 feet	Running Slope	9-10%	6 ft	10	SF	\$120	\$1,152	
1352696	3.1 to 4.1 feet	Running Slope	6-7%	6 ft	6	SF	\$120	\$720	
1352684	18.6 to 19.6 feet	Vertical Change	.3	6 ft	6	LF	\$75	\$450	
1352687	28.9 to 37.4 feet	Cross Slope (PAR)	2-3%	6 ft	51	SF	\$120	\$6,120	
1352685	34.6 to 35.6 feet	Vertical Change	.3	6 ft	6	REF			
1352688	43.0 to 44.6 feet	Cross Slope (PAR)	2-3%	6 ft	10	SF	\$120	\$1,152	
1352689	46.7 to 47.9 feet	Cross Slope (PAR)	5-6%	6 ft	7	SF	\$120	\$864	
1352690	50.3 to 52.5 feet	Cross Slope (PAR)	2-3%	6 ft	13	SF	\$120	\$1,584	
1352686	59.4 to 60.4 feet	Vertical Change	.3	6 ft	6	LF	\$75	\$450	
1352691	83.3 to 85.7 feet	Cross Slope (PAR)	2-3%	6 ft	14	SF	\$120	\$1,728	
1352694	84.0 to 85.0 feet	Protruding Object	50"	6 ft	6	JOB	\$225	\$225	
1352692	92.3 to 97.2 feet	Cross Slope (PAR)	2-3%	6 ft	29	SF	\$120	\$3,528	
1352693	105.7 to 108.5 feet	Cross Slope (PAR)	2-3%	6 ft	17	SF	\$120	\$2,016	
1352720	10.5 to 11.5 feet	Walkway Surface		6 ft	6	SF	\$120	\$720	
1352709	11.2 to 12.2 feet	Vertical Change	.4	6 ft	6	LF	\$75	\$450	
1352710	31.9 to 32.9 feet	Vertical Change	.6	6 ft	6	SF	\$75	\$450	
1352715	35.4 to 38.8 feet	Cross Slope (PAR)	2-3%	6 ft	20	SF	\$120	\$2,448	
1352711	52.5 to 53.5 feet	Vertical Change	.5	6 ft	6	LF	\$75	\$450	

Funding Source: **TBD**Year to be Completed **TBD**

Direction Traveled	Run ID	Route	Start of Route	End of Route	Year to be Completed				Priority
NW	1904171058	ROUTE 85	OLYMPIAN LOT 12	AQUATICS LANE					120
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total	
1352716	64.7 to 67.0 feet	Cross Slope (PAR)	2-3%	6 ft	14	SF	\$120	\$1,656	
1352721	70.9 to 71.9 feet	Walkway Surface		6 ft	6	SF	\$120	\$720	
1352712	73.0 to 74.0 feet	Vertical Change	.3	6 ft	6	LF	\$75	\$450	
1352717	84.0 to 93.9 feet	Cross Slope (PAR)	2-3%	6 ft	59	SF	\$120	\$7,128	
1352718	113.8 to 116.0 feet	Cross Slope (PAR)	2-3%	6 ft	13	SF	\$120	\$1,584	
1352713	114.0 to 115.0 feet	Vertical Change	.3	6 ft	6	REF			
1352722	134.3 to 135.3 feet	Walkway Surface		6 ft	6	SF	\$120	\$720	
1352719	136.9 to 148.7 feet	Cross Slope (PAR)	2-3%	6 ft	71	SF	\$120	\$8,496	
1352714	155.2 to 156.2 feet	Vertical Change	.3	6 ft	6	LF	\$75	\$450	
1352777	1.1 to 18.7 feet	Cross Slope (PAR)	2-3%	6 ft	106	SF	\$120	\$12,672	
1352778	27.7 to 35.4 feet	Cross Slope (PAR)	2-3%	6 ft	46	SF	\$120	\$5,544	
1352779	50.3 to 70.6 feet	Cross Slope (PAR)	2-3%	6 ft	122	SF	\$120	\$14,616	
1352780	79.1 to 83.9 feet	Cross Slope (PAR)	2-3%	6 ft	29	SF	\$120	\$3,456	
1352781	94.5 to 101.9 feet	Cross Slope (PAR)	2-3%	6 ft	44	SF	\$120	\$5,328	
1352775	101.1 to 102.1 feet	Vertical Change	.3	6 ft	6	REF			
1352776	117.6 to 118.6 feet	Vertical Change	.4	6 ft	6	LF	\$75	\$450	
1352783	144.2 to 145.8 feet	Running Slope	5-6%	6 ft	10	SF	\$120	\$1,152	
1352782	170.9 to 172.8 feet	Cross Slope (PAR)	2-3%	6 ft	11	SF	\$120	\$1,368	
1352914	1.6 to 3.3 feet	Running Slope	5-6%	12 ft	20	REF			
1352915	5.8 to 7.0 feet	Running Slope	5-6%	12 ft	14	SF	\$120	\$1,728	
1352904	12.8 to 19.7 feet	Cross Slope (PAR)	2-3%	12 ft	83	SF	\$120	\$9,936	
1352905	24.0 to 25.3 feet	Cross Slope (PAR)	5-6%	12 ft	16	SF	\$120	\$1,872	
1352906	26.8 to 29.6 feet	Cross Slope (PAR)	2-3%	12 ft	34	SF	\$120	\$4,032	
1352907	55.6 to 57.8 feet	Cross Slope (PAR)	2-3%	12 ft	26	SF	\$120	\$3,168	
1352908	72.3 to 75.1 feet	Cross Slope (PAR)	2-3%	12 ft	34	SF	\$120	\$4,032	
1352909	81.3 to 88.6 feet	Cross Slope (PAR)	2-3%	12 ft	88	SF	\$120	\$10,512	
1352910	96.8 to 100.8 feet	Cross Slope (PAR)	2-3%	12 ft	48	SF	\$120	\$5,760	
1352911	104.3 to 108.7 feet	Cross Slope (PAR)	2-3%	12 ft	53	SF	\$120	\$6,336	

Funding Source: **TBD**Year to be Completed **TBD**

Direction Traveled	Run ID	Route	Start of Route	End of Route						Priority
NW	1904171227	ROUTE 90	FORUM LOT 8	FORUM LOT 8						118.75
ID	Dist. from Route Start	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total		
1352912	113.0 to 120.8 feet	Cross Slope (PAR)	2-3%	12 ft	94	SF	\$120	\$11,232		
1352913	123.3 to 127.3 feet	Cross Slope (PAR)	2-3%	12 ft	48	SF	\$120	\$5,760		
1352942	2.0 to 6.3 feet	Running Slope	8-9%	8 ft	34	SF	\$120	\$4,128		
1352943	6.3 to 11.8 feet	Running Slope	6-7%	8 ft	44	SF	\$120	\$5,280		
1352944	12.5 to 13.7 feet	Running Slope	5-6%	8 ft	10	SF	\$120	\$1,152		
1352945	30.6 to 31.6 feet	Running Slope	5-6%	8 ft	8	SF	\$120	\$960		
1353134	0.0 to 3.7 feet	Running Slope	8-9%	5 ft	19	SF	\$120	\$2,220		
1353135	3.7 to 5.0 feet	Running Slope	6-7%	5 ft	7	SF	\$120	\$780		
1353136	5.0 to 11.3 feet	Running Slope	5-6%	5 ft	32	SF	\$120	\$3,780		
1353131	27.3 to 36.8 feet	Cross Slope (PAR)	2-3%	5 ft	47	SF	\$120	\$5,700		
1353137	40.5 to 43.9 feet	Running Slope	5-6%	5 ft	17	SF	\$120	\$2,040		
1353132	73.2 to 74.5 feet	Cross Slope (PAR)	2-3%	5 ft	7	SF	\$120	\$780		
1353133	104.3 to 105.3 feet	Protruding Object	58"	5 ft	5	JOB	\$225	\$225		
1353129	135.5 to 136.5 feet	Vertical Change	2.6	5 ft	5	SF	\$75	\$375		
1353130	140.9 to 141.9 feet	Vertical Change	.3	5 ft	5	LF	\$75	\$375		
1352962	19.8 to 21.7 feet	Running Slope	5-6%	8 ft	15	SF	\$120	\$1,824		

Total Cost for College Sidewalks:**\$2,431,679.57**